


Occhio

verticale NV

Montageanleitung
mounting instructions



verticale NV

Montageanleitung S.2
mounting instructions p. 17





Die Montage von Elektrokomponenten darf nur von qualifiziertem Fachpersonal durchgeführt werden!

Vor den Arbeiten an der Leuchte diese unbedingt vom Netz trennen!



Den Sicherheitsabstand zu brennbaren Objekten einhalten!

Vor dem Wechsel des Reflektorkopfes, des Reflektors und des Leuchtmittels, Leuchte ausschalten und abkühlen lassen.

Vorsicht, Verbrennungsgefahr!

Niemals den heißen Reflektorkopf, nur den Leuchtenarm im mittleren oder unteren Bereich berühren!

Reparaturarbeiten dürfen nur von autorisiertem Fachpersonal oder dem Hersteller durchgeführt werden.


Produktbeschreibung

Occhio verticale NV ist eine Niedervolt-Halogen-Leuchte der Schutzklasse 2. Die Leuchte wird wahlweise mit verschiedenen Reflektorköpfen ausgeliefert.


Inhalt


- 3 Produktbeschreibung
- 4 Aufbau
- 5 Montagemöglichkeiten
- 6 Montage auf Hohlraum-/Einputzdose
- 9 Reflektorkopf aufsetzen/wechseln
- 9 Leuchtmittel wechseln
- 10 Leuchte einstellen
- 11 Pflegehinweise
- 12 Info & Kontakt
- 13 Technische Daten
- 14 Technische Daten verticale NV
- 15 Leuchtmittel

Leuchtenkörper

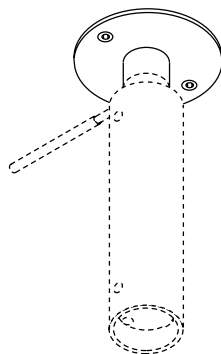


Reflektorkopf

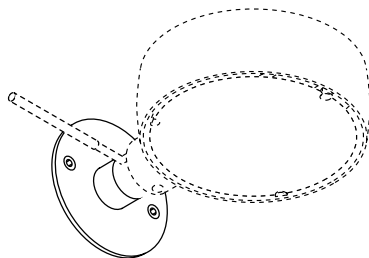

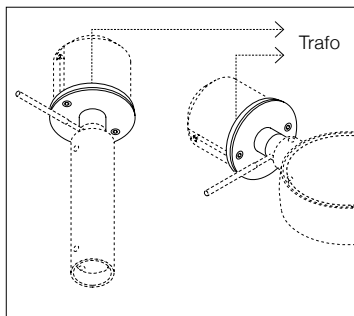

Hohlraum- oder Einputzdose

Beim Anschluss an einen externen elektronischen Transformator (Trafo) kann die vertikale NV Leuchte mit flacher Montagedose direkt auf eine Einputzdose oder eine Hohlraumdose montiert werden.

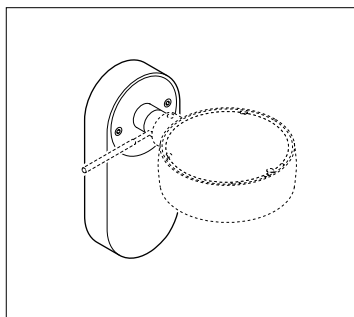


Aufbauversion

In der Aufbauversion wird die NV Leuchte auf ein entsprechendes NV Gehäuse montiert.




Die Montage wird in der jeweiligen Anleitung zum Gehäuse beschrieben.

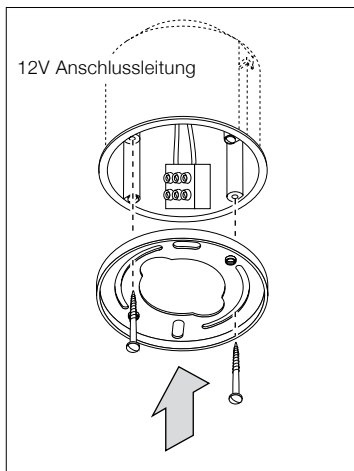


Achtung!
Vor der Montage alle stromführenden Leitungen vom Stromnetz trennen!

Flache Dose auf Hohlraum-Einputzdose aufschrauben.

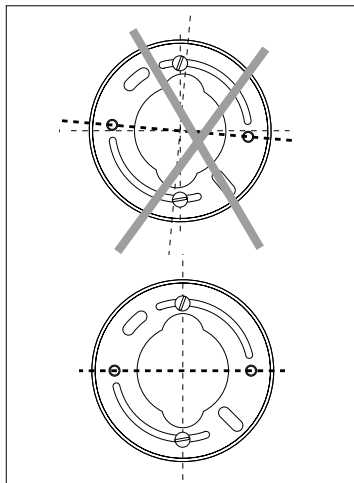

Gewindebohrungen zur Befestigung der Leuchte an der Decke rechtwinklig zum Raum ausrichten. Bei der Befestigung an der Wand waagrecht ausrichten.

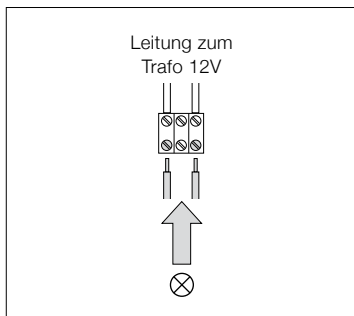


Trafo-Leistung muss auf die Leuchte abgestimmt sein.

Kabel des Leuchtenkörpers nach Schema an die Klemme anschließen.


12V Anschlussleitung zum Trafo:

Querschnitt mindestens 1mm²


Leitungslänge maximal 2m.

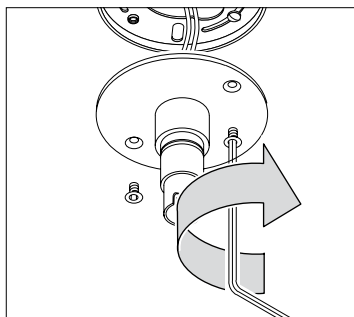

Leuchtenkörper auf Dose aufsetzen und mit mitgelieferten Inbusschrauben anschrauben.

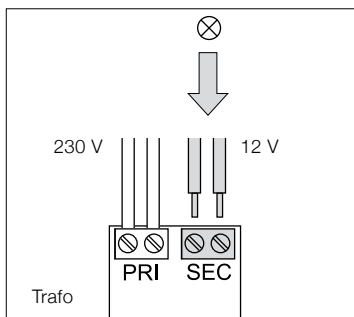


Auf korrekten Anschluss des Kabels am Trafo achten.

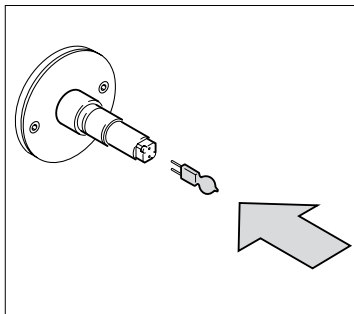

Achtung!
Vor der Montage alle stromführenden
Leitungen vom Stromnetz trennen!
Reflektorköpfe abkühlen lassen!

Niedervolthalogen Leuchtmittel in die
Gy6.35 Stiftfassung setzen.

Den Glaskolben des Leuchtmittels nur mit
einem weichen Tuch, nicht mit der bloßen
Hand anfassen.

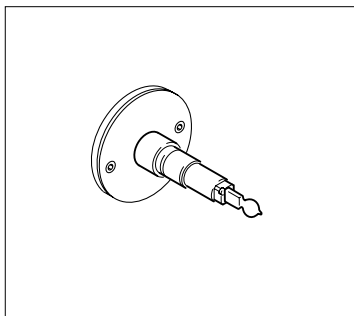

Fingerabdrücke auf dem Leuchtmittel vor
dem Einschalten der Leuchte mit einem
weichen Tuch abwischen.

Reflektorkopf aufsetzen/wechseln




Die Montage des Reflektorkopfes wird in der getrennt beiliegenden Anleitung zum entsprechenden Reflektorkopf beschrieben.

Leuchtmittel wechseln



Das Wechseln des Leuchtmittels wird in der getrennt beiliegenden Anleitung zum entsprechenden Reflektorkopf beschrieben.

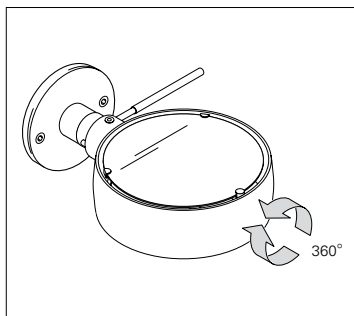

Der Reflektorkopf ist ohne Anschlag frei drehbar.

Pflegehinweise

Zur Reinigung der Metall- als auch der Glasteile der Leuchte empfehlen wir die Verwendung eines Glasreinigers.

Leuchte nur in abgekühltem Zustand reinigen!

Weitere Fragen beantwortet gerne Ihr
Occhio Fachhändler

www.occhio.com
info@occhio.com

Technische Daten

Artikelbezeichnung:
Occhio verticale NV

Niedervolt-Halogen Leuchtmittel
Sockel Gy6.35
max. 60 W

Die Leuchte lässt sich über Niedervolt-Halogen-geeignete Wandeinbaudimmer betreiben.

Technische und gestalterische Änderungen vorbehalten

IP 20   

vericale NV			_ chrom matt M _ chrom C
	20 cm	max. 60 W	7V 11 00 _
	30 cm	Niedervolt-Halogen Gy6.35	7V 12 00 _
	40 cm		7V 13 00 _
	60 cm		7V 14 00 _

Leuchtmittel

Niedervolt-Halogen
ECO Gy6.35



50 W

5G 00 50 C

60 W

5G 00 60 C

Occhio

verticale NV

mounting instructions



Safety precautions



Electrical components must be assembled only by qualified personnel.

Before working on the lamp, always disconnect it from the mains.



Maintain the minimum safety distance from flammable materials.

Before changing the reflector head, the reflector or the bulb, switch off the lamp and allow it to cool down.

Caution, risk of burns.

Never touch the reflector head while it is hot. Only handle the middle or bottom part of the lamp stem.

Repairs must be carried out only by authorised, qualified personnel or the manufacturer.

Product description

Occhio verticale NV is a low voltage halogen lamp, safety class 2.



The lamp is available with a choice of different reflector heads.

Contents


- 19 Product description
- 20 Configuration
- 21 Mounting options
- 22 Fitting to a plastering/built-in box
- 25 Fitting/replacing the reflector head
- 25 Replacing the bulb
- 26 Adjusting the lamp
- 27 Care instructions
- 28 Information & contact
- 29 Technical data
- 30 Technical data, verticale NV
- 31 Bulbs

Lamp body

Reflector head

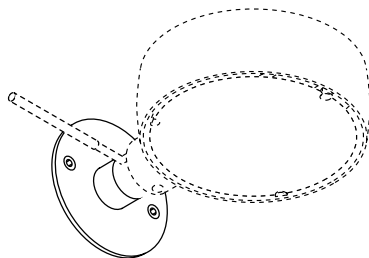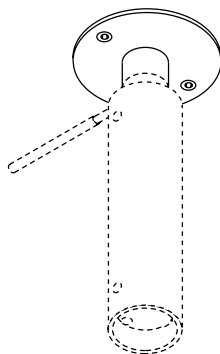


Mounting options

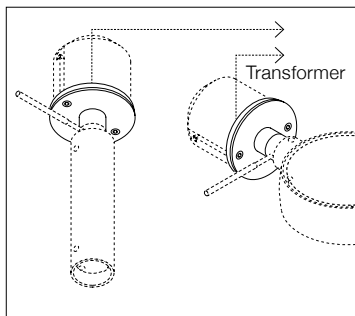

Plastering or built-in box

When connected to an external electronic transformer, the vertical NV lamp with flat mounting box can be mounted directly to a built-in box or a plastering box.

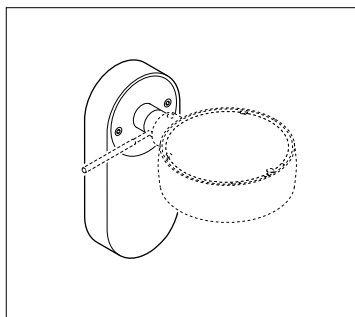


Surface-mounted version

In the surface-mounted version, the NV lamp is mounted on a corresponding NV housing.




The mounting procedure is described in the respective instructions for the housing.

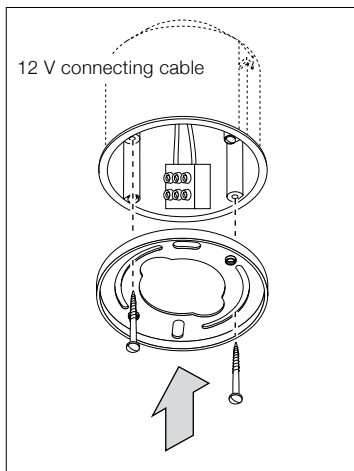


Caution

Before mounting, disconnect all current-carrying lines from the mains supply.

Screw the flat box onto the plastering/built-in-box.

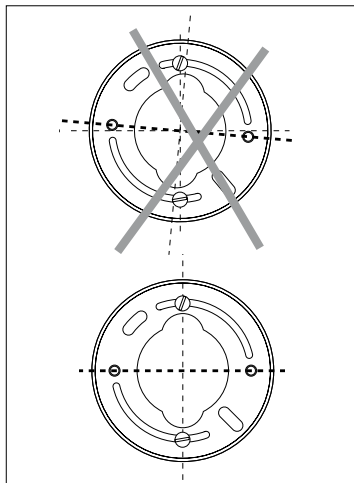


The tap holes for fixing the lamp to the ceiling should be aligned perpendicular to the cavity. When fixing the lamp to the wall, align them horizontally.

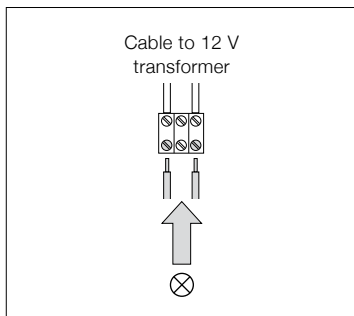


The output rating of the transformer must be compatible with the lamp.


Connect the cable for the lamp body to the terminal(s) as shown in the diagram.
12 V connecting cable to the transformer:
cross section at least 1 mm²
maximum cable length: 2 m.

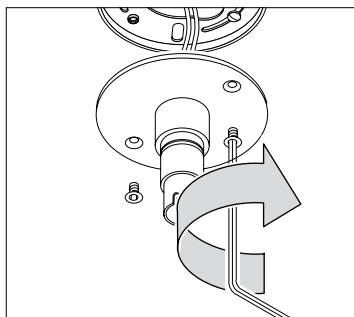

Fit the lamp body onto the box and screw on with the Allen screws provided.

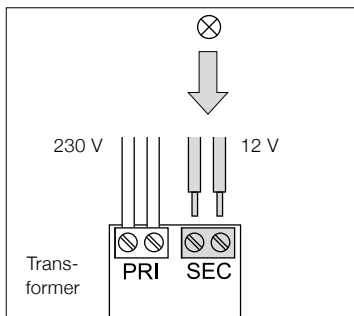

Make sure that the cable is properly connected to the transformer.

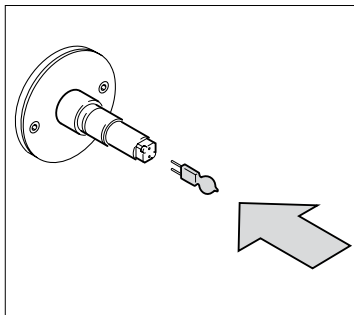

Caution


Before mounting, disconnect all current-carrying lines from the mains supply.

Allow reflector heads to cool.

Fit the low voltage halogen bulb into the Gy 6.35 pin socket.

Always use a soft cloth when handling the bulb glass. Never touch it with bare hands.

Use a soft cloth to wipe off any finger prints left on the bulb before switching the lamp on.

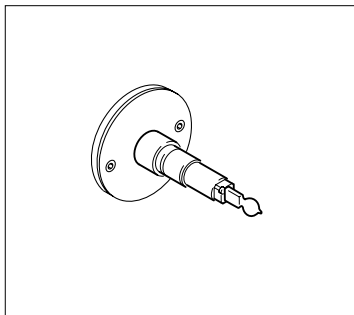

Fitting/replacing the reflector head



Reflector head assembly is described separately in the enclosed instructions for the respective reflector head.


Replacing the bulb



How to replace the bulb is described separately in the enclosed instructions for the respective reflector head.

Adjusting the lamp

The reflector head is free to turn and not limited by stops.

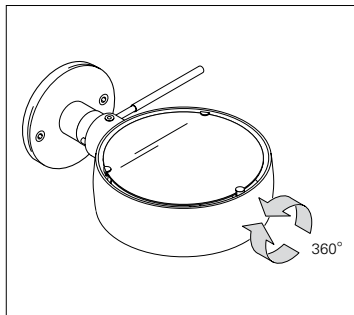

Care instructions

We recommend using a glass cleaner to clean both the metal and glass parts of the lamp.

Always allow the lamp to cool down before cleaning.

Information & contact

Your Occhio specialist retailer will gladly answer any other questions

www.occhio.com

info@occhio.com

Technical data

Item description:

Occhio verticale NV

Low voltage halogen bulb

Base Gy6.35

max. 60 W

The lamp can be operated by built-in wall dimmers suitable for low voltage halogen bulbs.

Subject to technical and design modifications without notice

IP20   

Technical data, verticale NV

verti- cale	NV			_ chrome matt M
				_ chrome C
		20 cm	max. 60 W	7V 11 00 _
		30 cm	Low voltage halogen Gy6.35	7V 12 00 _
		40 cm		7V 13 00 _
		60 cm		7V 14 00 _

Bulbs

Low voltage halogen
ECO Gy6.35



50 W
60 W

5G 00 50 C
5G 00 60 C

Occhio

Occhio GmbH
Wiener Platz 7
D 81667 München
Fon +49-89-44 77 86 30
Fax +49-89-44 77 86 39
info@occhio.com
www.occhio.com

