


## Coro alto up phase-cut datasheet

LED ceiling spotlight with cylindrical base and zoom optic (swivable). up version for surface mounting. Version with integrated power supply unit, connection to 230 V AC mains voltage. Dimmable via phase-cut dimmer. The color temperature can be configured to 2700 K, 3000 K or 4000 K when ordering.

The zoom optic can be rotated by 360° (with end-stop), swiveled by 30° and the light cone can be adjusted continuously between 25–60°.


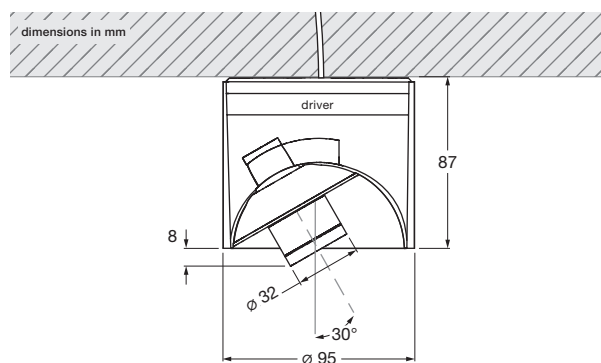


### technical data Coro alto up phase-cut



|             |                                       |                                                                                                                                          |
|-------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| properties  | material                              | aluminium, glass, PVD coated, painted, plastic                                                                                           |
|             | turning range                         | 360° (with stop)                                                                                                                         |
|             | mobility head                         | 30°                                                                                                                                      |
|             | weight                                | 0.9 kg                                                                                                                                   |
| surface     | head / zoom                           | gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished |
|             | tube                                  | matt white, matt black                                                                                                                   |
| Occhio LED  | average life time                     | > 50.000 hrs                                                                                                                             |
|             | energy efficiency class               | This product contains a light source of energy efficiency class F (2700 K, 3000 K) or E (4000 K)                                         |
|             | power                                 | LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)                                                                   |
|             | color rendering index                 | CRI Ra 92                                                                                                                                |
|             | color temperature (color consistency) | 2700K / 3000K / 4000 K (2-step)                                                                                                          |
| electricity | dimming                               | via phase cut dimmer*                                                                                                                    |
|             | connection                            | 230 V AC                                                                                                                                 |
|             | permitted operating conditions        | ambient temperature 10–30°C, for indoor use only                                                                                         |

\* dimmer not included in the scope of delivery, for a list of compatible dimmers, see [www.occhio.com/dim\\_en](http://www.occhio.com/dim_en)

Coro alto up phase-cut  
lighting effects

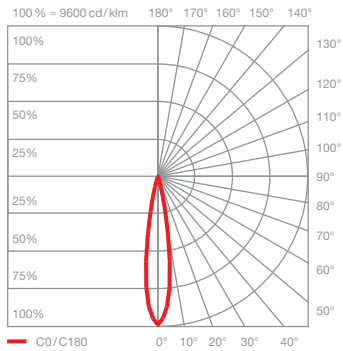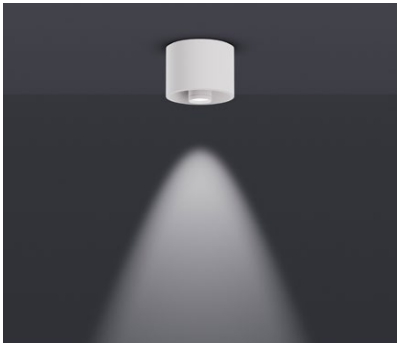

|                              |            |        |
|------------------------------|------------|--------|
| <b>Z25</b>                   |            |        |
| directed light (approx. 25°) |            |        |
| optics:                      | zoom lens  |        |
| power:                       | high color | 9 W    |
| luminous flux:               | 2700 K     | 400 lm |
|                              | 3000 K     | 420 lm |
|                              | 4000 K     | 480 lm |

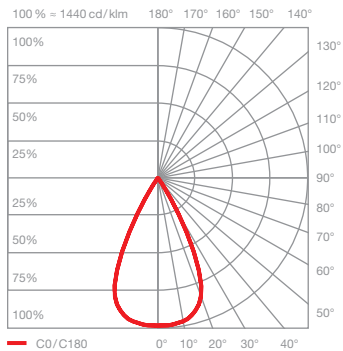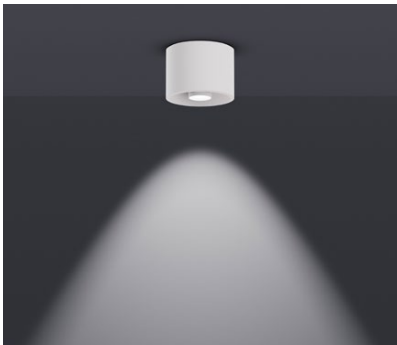

|                              |            |        |
|------------------------------|------------|--------|
| <b>Z60</b>                   |            |        |
| directed light (approx. 60°) |            |        |
| optics:                      | zoom lens  |        |
| power:                       | high color | 9 W    |
| luminous flux:               | 2700 K     | 450 lm |
|                              | 3000 K     | 480 lm |
|                              | 4000 K     | 540 lm |