


## Coro moon alto flat »air« datasheet

LED ceiling spotlight with cylindrical base and fireball light source (swivable). flat version for mounting on hollow ceilings. Version with remote power supply unit, connection to 230 VAC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K).



The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source can be rotated by 360° (with end-stop), swiveled by 30° and has a light cone of 30°

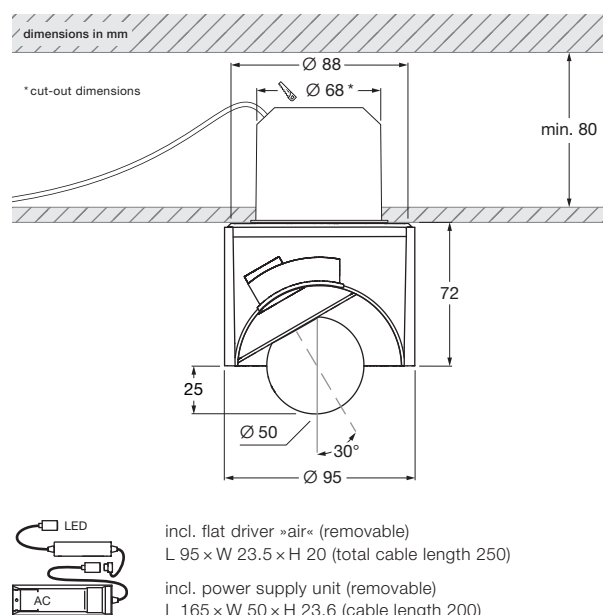

### technical data Coro moon alto flat »air«

|                         |                                       |                                                                                                                                          |
|-------------------------|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| properties              | material                              | aluminium, glass, PVD coated, painted, plastic                                                                                           |
|                         | turning range                         | 360° (with stop)                                                                                                                         |
|                         | mobility head                         | 30°                                                                                                                                      |
|                         | weight                                | 1 kg                                                                                                                                     |
| surface                 | head                                  | gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished |
|                         | tube                                  | matt white, matt black                                                                                                                   |
| Occhio »color tune« LED | average life time                     | > 50.000 hrs                                                                                                                             |
|                         | energy efficiency class               | This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)                                         |
|                         | power                                 | LED 9W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)                                                                    |
|                         | color rendering index                 | CRI Ra 92                                                                                                                                |
|                         | color temperature (color consistency) | color tune: 2200–3500 K (2-step)      2700–4000 K (2-step)                                                                               |
| electricity             | dimming                               | via Occhio air                                                                                                                           |
|                         | connection                            | 230 V AC                                                                                                                                 |
|                         | permitted operating conditions        | ambient temperature 10–30°C, for indoor use only                                                                                         |

## Coro moon alto flat »air« lighting effects

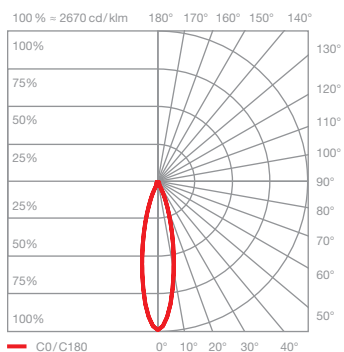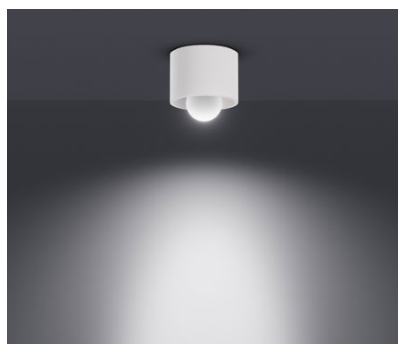

### moon

direct, glare-free light,  
beam angle approx. 30°

optics: Occhio fireball

power: high color 9 W

luminous flux: 2200–3500 K 510–660 lm  
2700–4000 K 580–710 lm