


Coro moon piano v cover phase-cut datasheet

LED recessed downlight with fireball light source (non-tiltable). piano v downlight version for mounting on hollow ceilings. cover model with magnetically attached decorative ring. The downlight is mounted with a simple tension spring mechanism and requires no screw fittings. Version with remote power supply unit, connection to 230 V AC mains voltage. Dimmable via phase-cut dimmer. The color temperature can be configured to 2700 K, 3000 K or 4000 K when ordering.

The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

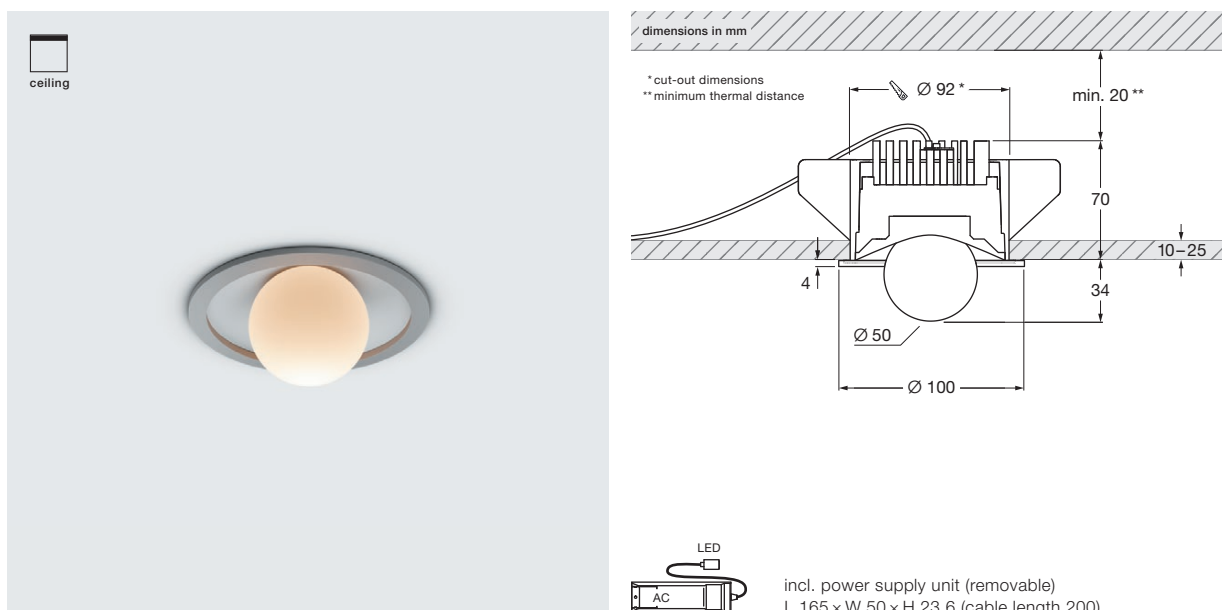


technical data Coro moon piano v cover phase-cut

properties	material	aluminium, glass, PVD coated, painted, plastic
	weight	1.1 kg
surface	tube	matt white, matt black
	cover	gold, matt gold, rose gold polished, matt silver, matt white, matt black phantom polished, black phantom polished, dark chrome polished
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2700 K, 3000 K) or E (4000 K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	2700K/3000K/4000 K (2-step)
electricity	dimming	via phase cut dimmer*
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

* dimmer not included in the scope of delivery, for a list of compatible dimmers, see www.occhio.com/dim_en

Coro moon piano v cover phase-cut lighting effects

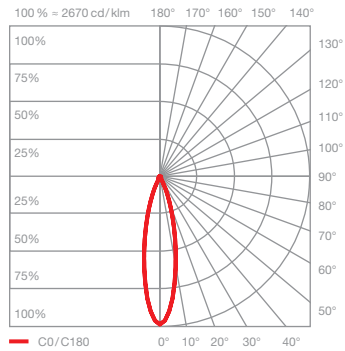

moon

direct, glare-free light,
beam angle approx. 30°

optics: Occhio fireball

power: high color 9W

luminous flux: 2700 K 670 lm
3000 K 720 lm
4000 K 820 lm