


Coro moon sospeso fix pro pure datasheet


LED suspended luminaire with rod-shaped head and fireball light source with directed light aimed downwards. Version for hollow ceilings with flush cord suspension. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The innovative LED fireball technology creates a special lighting effect - direct light in forward direction and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 30°.

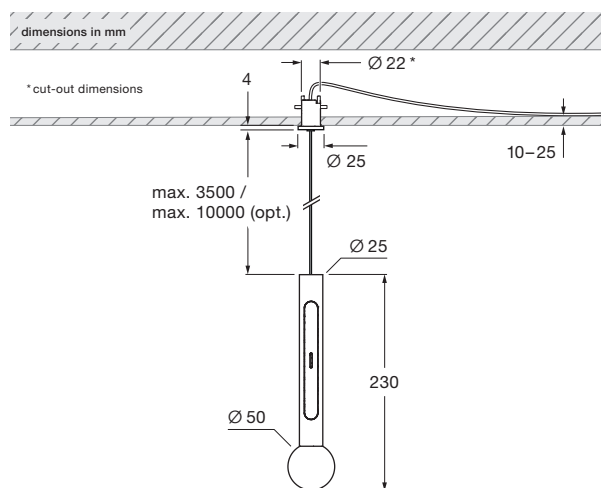

technical data Coro moon sospeso fix pro pure

properties	material	aluminium, glass, PVD coated, painted, plastic
	height setting	max. 3500 mm (can be adjusted during fitting)
	weight	0.4 kg
surface	head	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K)
	power	LED 6 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 12 VDC color tune (2-channel): max. 1000 mA total current (I ₁ + I ₂) / 6 VDC per channel
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro moon sospeso fix pro pure lighting effects

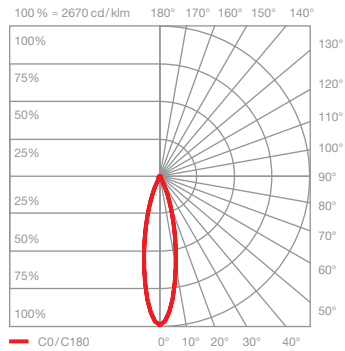

moon

direct, glare-free light,
beam angle approx. 30°

optics: Occhio fireball

power: high color 6 W

luminous flux:	2700 K	450 lm
	3000 K	480 lm
	4000 K	540 lm
	2200–3500 K	340–440 lm
	2700–4000 K	390–470 lm