

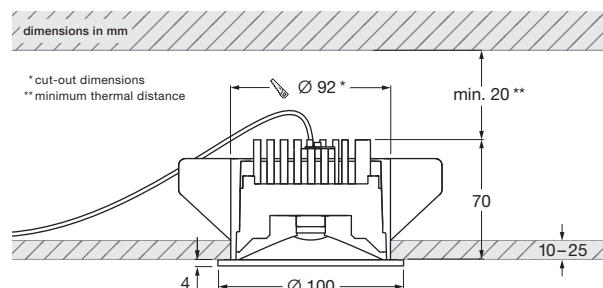


Coro piano v cover »air« datasheet

LED recessed downlight with fixed lens optic (non-tiltable). piano v downlight version for mounting on hollow ceilings. cover model with magnetically attached decorative ring. The downlight is mounted with a simple tension spring mechanism and requires no screw fittings.

Version with remote power supply unit, connection to 230 VAC mains voltage. Switching, dimming and »color tune« via Occhio air. The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The fixed lens optic has a light cone of 60°.


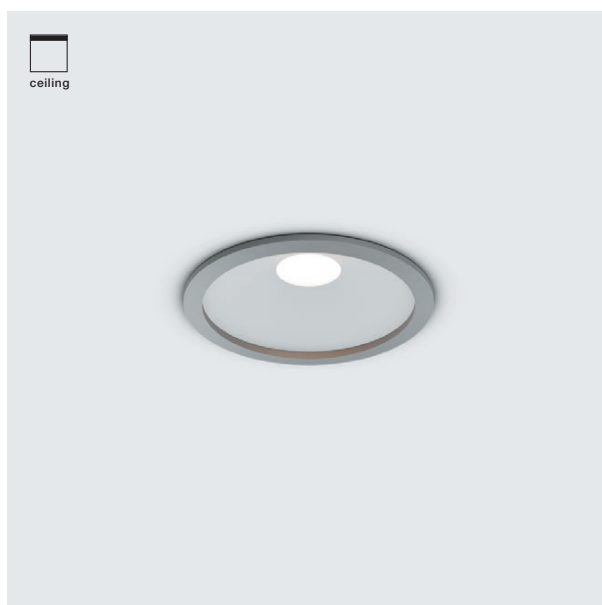


incl. flat driver »air« (removable)
L 95 × W 23.5 × H 20 (total cable length 250)
incl. power supply unit (removable)
L 165 × W 50 × H 23.6 (cable length 200)

technical data Coro piano v cover »air«

properties	material	aluminium, glass, PVD coated, painted, plastic
	weight	1 kg
surface	tube	matt white, matt black
	cover	gold, matt gold, rose gold polished, matt silver, matt white, matt black phantom polished, black phantom polished, dark chrome polished
Occhio »color tune« LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)
	power	LED 9 W (incl. Occhio power supply unit approx. 12 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	via Occhio air
	connection	230 VAC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro piano v cover »air« lighting effects

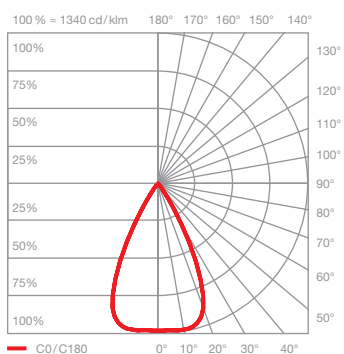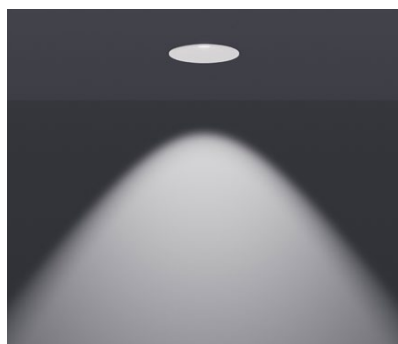

lens

direct light, beam angle approx. 60°

optics: lens

power: high color 9 W

luminous flux: 2200–3500 K 310–410 lm
2700–4000 K 360–430 lm