
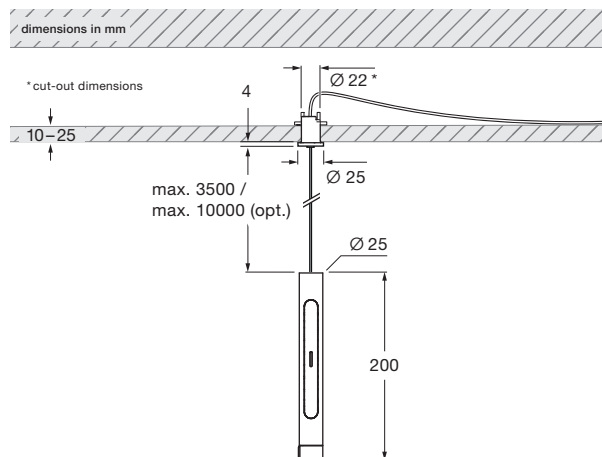


Coro sospeso fix pro pure datasheet



LED suspended luminaire with rod-shaped head and zoom optics. Version for hollow ceilings with flush cord suspension. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The zoom optics are glare-free and continuously adjustable within 40–80°.

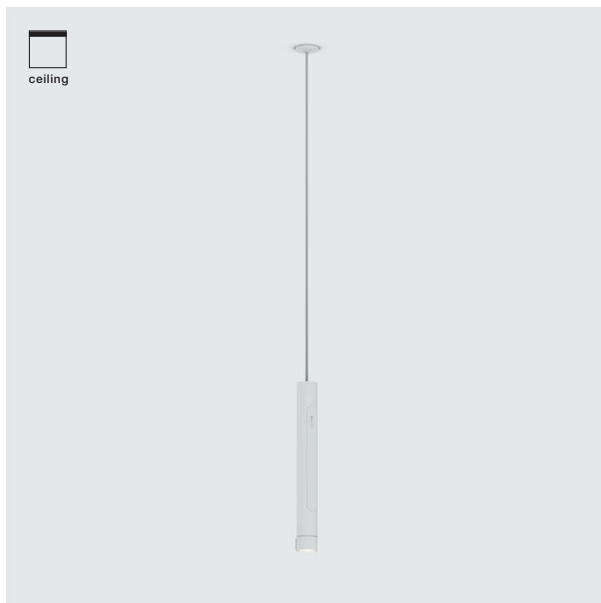

technical data Coro sospeso fix pro pure

properties	material	aluminium, glass, PVD coated, painted, plastic
	height setting	max. 3500 mm (can be adjusted during fitting)
	weight	0.3 kg
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500 K, 2700 K, 3000 K) or E (2700–4000 K, 4000 K)
	power	LED 6W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step) 2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 12 VDC color tune (2-channel): max. 1000 mA total current ($I_1 + I_2$) / 6 VDC per channel
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

Coro sospeso fix pro pure lighting effects

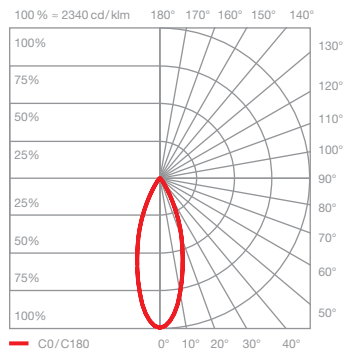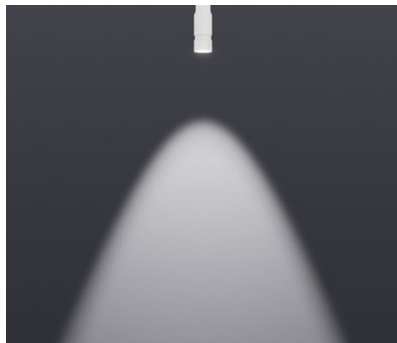



Z40

directed light (approx. 40°)

optics: zoom lens

power: high color 6 W

luminous flux: 2700 K 170 lm
3000 K 180 lm
4000 K 210 lm
2200–3500 K 130–170 lm
2700–4000 K 150–180 lm

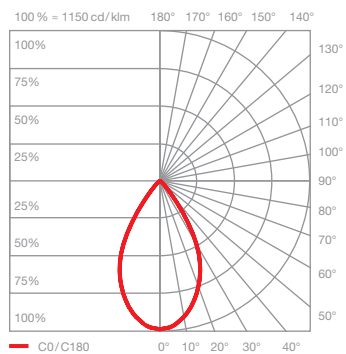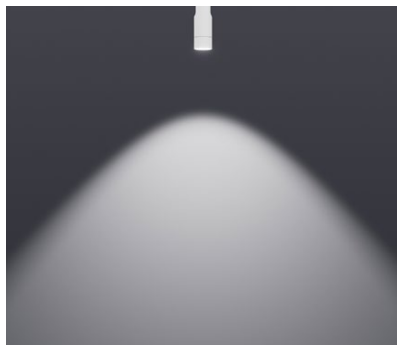

Z80

directed light (approx. 80°)

optics: zoom lens

power: high color 6 W

luminous flux: 2700 K 270 lm
3000 K 280 lm
4000 K 320 lm
2200–3500 K 200–260 lm
2700–4000 K 230–280 lm