


Coro sospeso fix pure phase-cut datasheet

LED suspended luminaire with rod-shaped head and zoom optic. pure version with recessed wire suspension for mounting on hollow ceilings with revision. The suspension cable is adjustable to max. 350 cm (optional max. 1000 cm) during mounting. Version with remote power supply unit, connection to 230 V AC mains voltage. Dimmable via phase-cut dimmer. The color temperature can be configured to 2700 K, 3000 K or 4000 K when ordering.

The zoom optic is glare-free and the beam angle continuously adjustable between 40–80°.


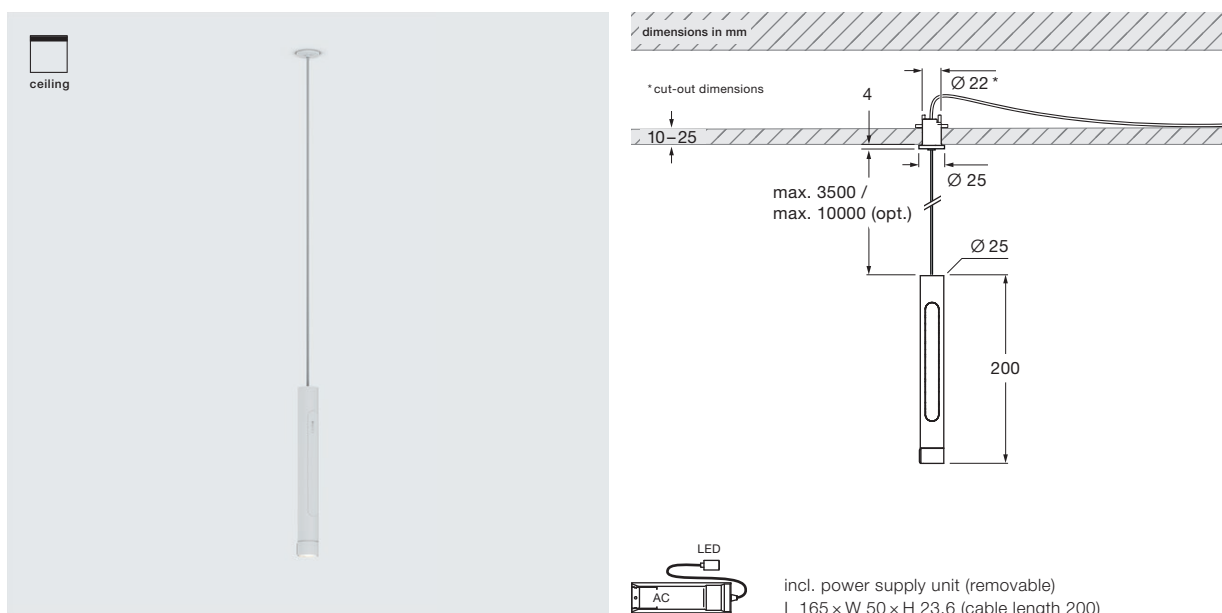


technical data Coro sospeso fix pure phase-cut

properties	material	aluminium, glass, PVD coated, painted, plastic
	height setting	max. 3500 mm (can be adjusted during fitting) optional: max. 10000 mm (can be adjusted during fitting)
	weight	0.6 kg
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished
	pads / cover	matt white, matt black
	cable	white, black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class	This product contains a light source of energy efficiency class F (2700 K, 3000 K) or E (4000 K)
	power	LED 6 W (incl. Occhio power supply unit approx. 8 W, standby < 0.5 W)
	color rendering index	CRI Ra 92
	color temperature (color consistency)	2700K/3000K/4000 K (2-step)
electricity	dimming	via phase cut dimmer*
	connection	230 V AC
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only



* dimmer not included in the scope of delivery, for a list of compatible dimmers, see www.occhio.com/dim_en

Coro sospeso fix pure phase-cut lighting effects

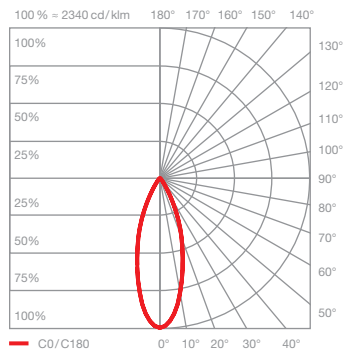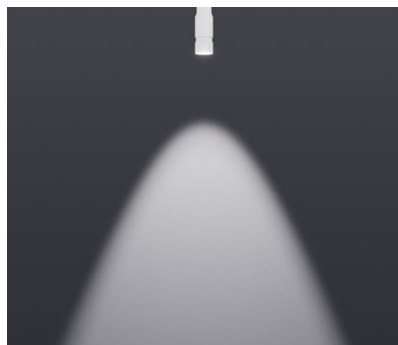

Z40 directed light (approx. 40°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2700 K	170 lm
	3000 K	180 lm
	4000 K	210 lm

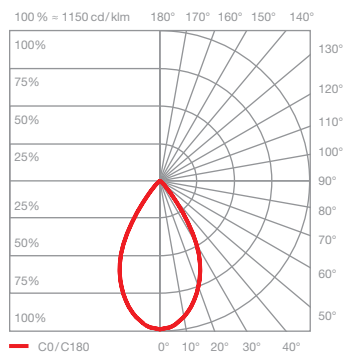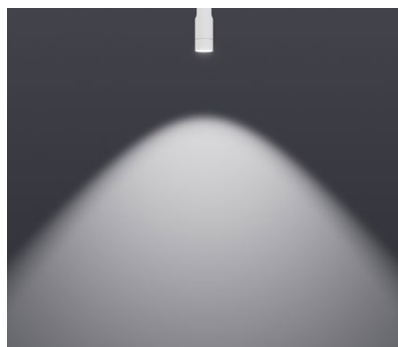

Z80 directed light (approx. 80°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2700 K	270 lm
	3000 K	280 lm
	4000 K	320 lm