


Coro sospeso var up »air« datasheet

LED suspended luminaire with rod-shaped head and zoom optic. up version for surface mounting. The suspension cable is continuously adjustable between 50–200 cm.



Version with integrated power supply unit, connection to 230 V AC mains voltage. Switching, dimming and »color tune« via Occhio air or »touchless control« (gesture control on head). The color temperature can be adjusted continuously between 2700–4000 K (optional 2200–3500 K). The zoom optic is glare-free and the beam angle continuously adjustable between 40–80°.

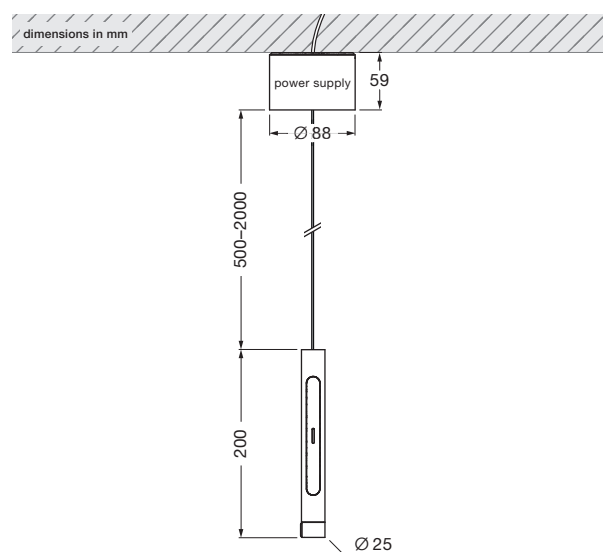

technical data Coro sospeso var up »air«



properties	material	aluminium, glass, PVD coated, painted, plastic	
	height adjustment	500–2000 mm (variable)	
	weight	0.6 kg	
surface	head / zoom	gold, matt gold, rose gold polished, matt silver, matt white, matt black, phantom polished, black phantom polished, dark chrome polished	
	pads / cover	matt white, matt black	
	cable	transparent	
Occhio »color tune« LED	average life time	> 50.000 hrs	
	energy efficiency class	This product contains a light source of energy efficiency class F (2200–3500K) or E (2700–4000K)	
	power	LED 6W (incl. Occhio power supply unit approx. 8W, standby < 0.5W)	
	color rendering index	CRI Ra 92	
	color temperature (color consistency)	color tune: 2200–3500 K (2-step)	2700–4000 K (2-step)
electricity	dimming	via »touchless control« and Occhio air	
	connection	230 V AC	
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only	

Coro sospeso var up »air« lighting effects

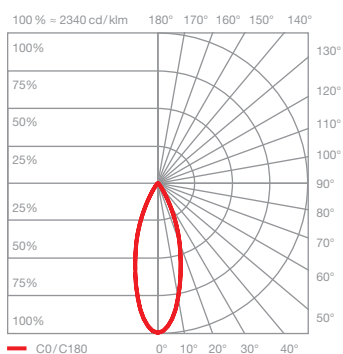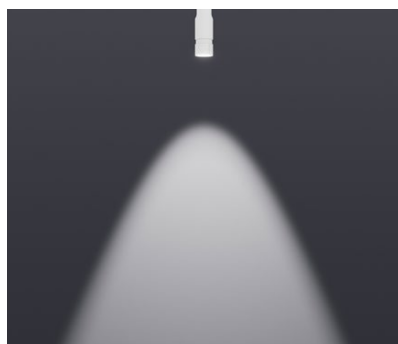

Z40 directed light (approx. 40°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2200–3500 K	130–170 lm
	2700–4000 K	150–180 lm

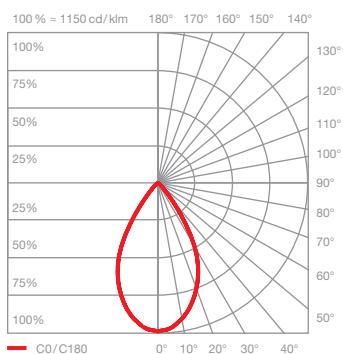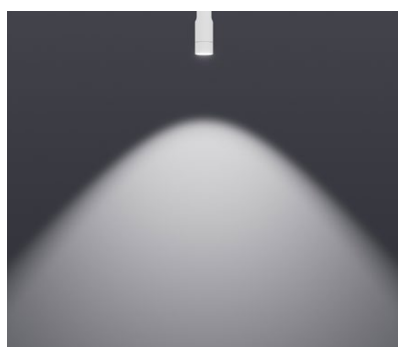

Z80 directed light (approx. 80°)

optics:	zoom lens	
power:	high color	6 W
luminous flux:	2200–3500 K	200–260 lm
	2700–4000 K	230–280 lm