


Più piano edge VOLT datasheet

LED recessed spotlight with filigree ceiling edge for hollow ceilings or solid ceilings with ceiling box. The spotlight is mounted with a simple tension wing mechanism and requires no screw fittings. Can be mounted flush with the ceiling (Più piano edge) or recessed (Più piano in edge). Choice of lens design (Più) or flat cone glass with interior lens (Più R). Version for connection to 230-volt AC at 50 hertz power supply, can be dimmed using trailing-edge phase cut dimmer.* Head can be freely positioned in all directions with the unique ball joint principle (Più piano 30°, Più piano in 20°). Optional inserts allow the lighting effect to be changed at any time with a simple mechanism; dichroic color filters can also be used, Occhio light modules can be exchanged.

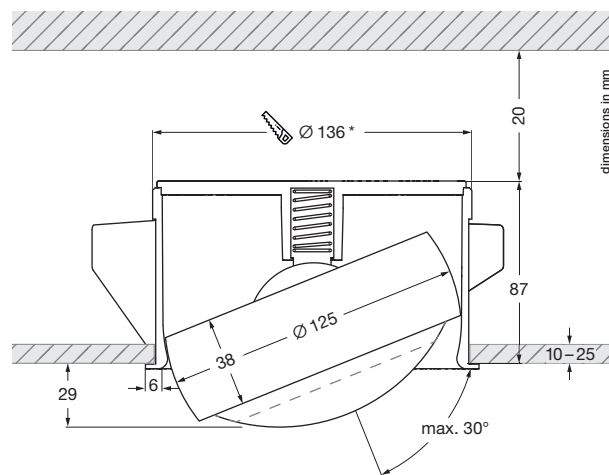

* cut-out dimensions
Installation depth: 107 mm
** minimum thermal distance, installation height depending on driver

technical data Più piano edge VOLT

properties	material	aluminium, brass, steel – chrome-plated or painted, optical plastic, glass
	turning range head	360°
	movability head	30° (with stop)
	weight	1.2 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	tube	matt white, matt black
	lens	matt white, matt black (lens edge)
	cone glass	rose gold, bronze, shiny chrome, dark chrome, matt chrome, matt white, matt black, phantom, black phantom
VOLT light engine	average life time	> 40.000 hrs
	energy efficiency class (luminous efficiency)	G (58 lm / W)
	power	LED 26 W (switchable 26 W / 18 W / 13 W)
	color rendering index	perfect color; CRI Ra 97
	color temperature (color consistency)	2700 K, 3000 K (2-step)
electricity	dimming	by trailing-edge phase-cut dimmer*
	connection	operation at 230 V AC / 50 Hz
	power factor power supply (cos ϕ 1)	0.9
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only

* For a list of compatible dimmers, see www.occhio.com/dim_en


Più piano edge VOLT

30° swivel angle
360° rotatability


Più piano edge VOLT
head H 38 mm, ø 125 mm



edge mounting tube



hollow ceiling



concrete ceiling
(Kaiser HaloX 250 with mineral-fibre board)
driver max. L 210 mm × W 30 mm




ceiling edge

* cut-out dimensions


Più piano edge VOLT

through-wiring


Più piano edge VOLT

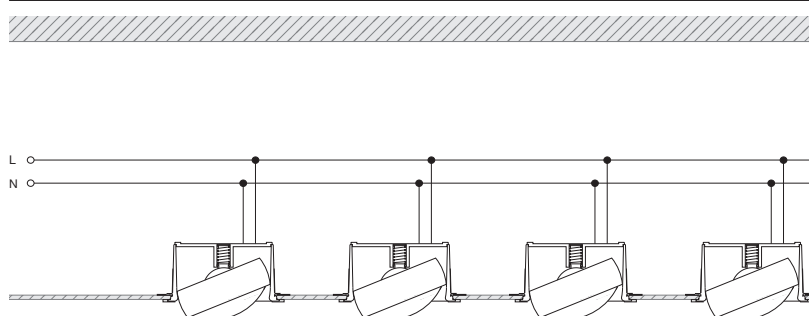

Più piano edge VOLT + Occhio air module max. 5 luminaires

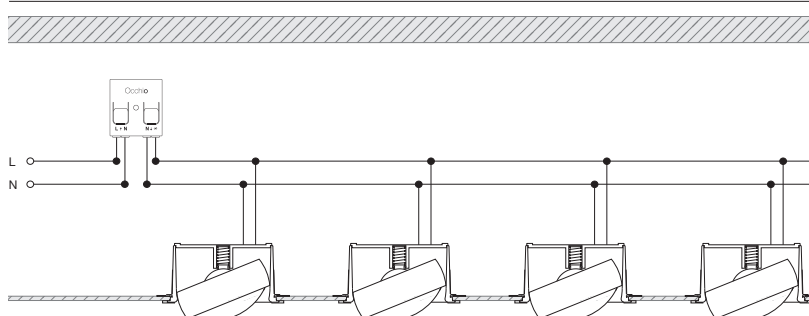



Più piano edge VOLT + trailing-edge phase-cut dimmer max. number depends on the max. wattage of trailing-edge phase-cut dimmer

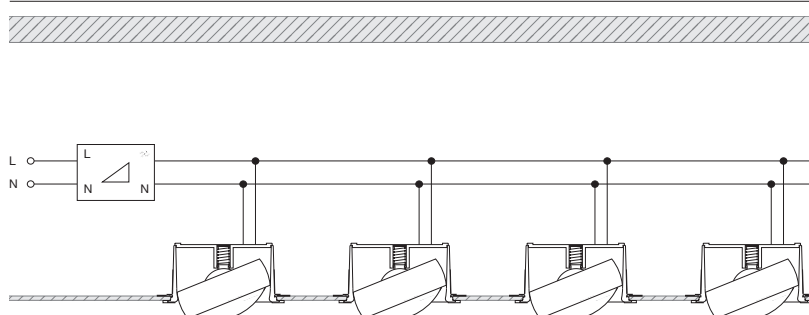

Più piano edge VOLT overview optics

Più		C 80	S 100	S 80	S 60	S 40	S 30	
small lens low								
small lens medium								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
lens								
Più R	B	C 100	C 80	S 100	S 80	S 60	S 40	S 30
small lens low								
small lens medium								
small lens high								
satinised glass								
soft edge glass								
fresnel lens								
color filter (optional)								
cone glass								
	diffus	100°, contour	80°, contour	100°, soft	80°, soft	60°, soft	40°, soft	30°, soft

Più piano edge VOLT
Più lighting effects

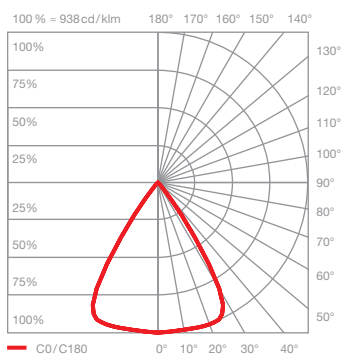
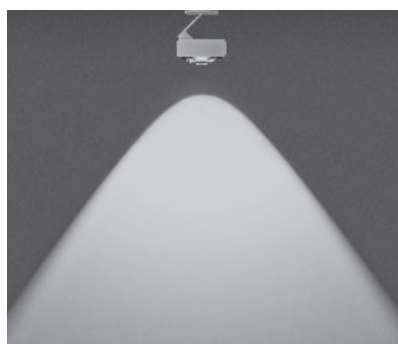


C 80 contour

scattered light with contour beam angle
(approx. 80°)

inserts: lens

luminous flux:	perfect color	26 W	1290 lm
	perfect color	18 W	970 lm
	perfect color	13 W	730 lm

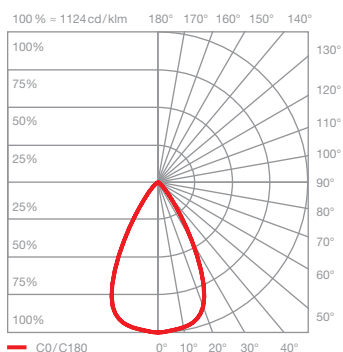
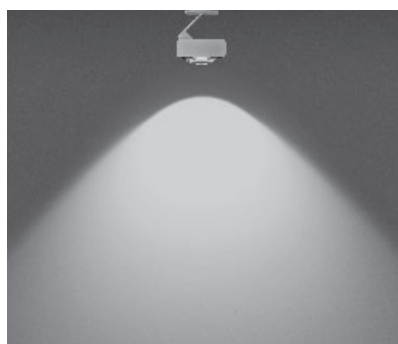


S 100 soft

scattered light with soft contour beam angle
(approx. 100°)

inserts: lens
satinised glass

luminous flux:	perfect color	26 W	1030 lm
	perfect color	18 W	780 lm
	perfect color	13 W	580 lm

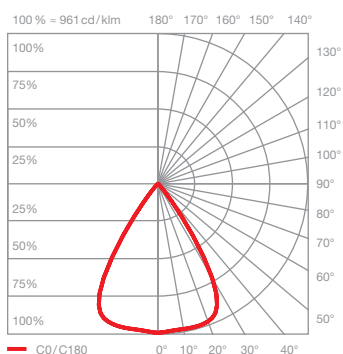
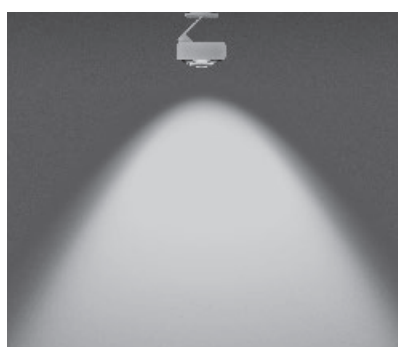


S 80 soft

scattered light with soft contour beam angle
(approx. 80°)

inserts: lens
soft edge glass

luminous flux:	perfect color	26 W	1140 lm
	perfect color	18 W	860 lm
	perfect color	13 W	640 lm

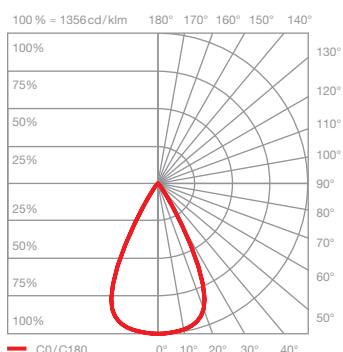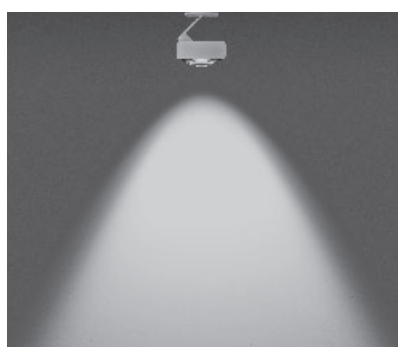



S 60 soft

scattered light with soft contour beam angle
(approx. 60°)

inserts: lens
small lens low
soft edge glass

luminous flux:	perfect color	26 W	1240 lm
	perfect color	18 W	930 lm
	perfect color	13 W	700 lm

Più piano edge VOLT
Più lighting effects

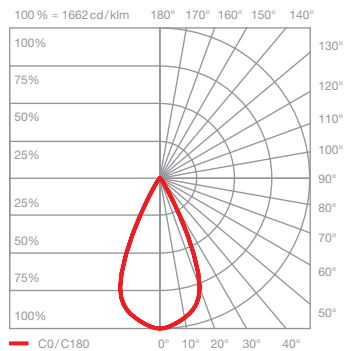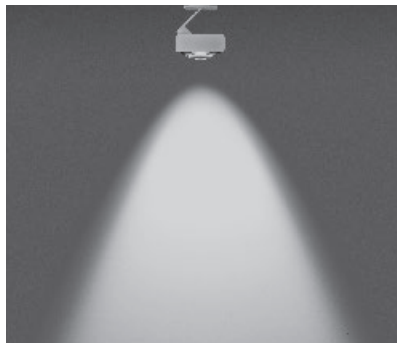


S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens
small lens medium
soft edge glass

luminous flux:	perfect color	26 W	1280 lm
	perfect color	18 W	960 lm
	perfect color	13 W	720 lm

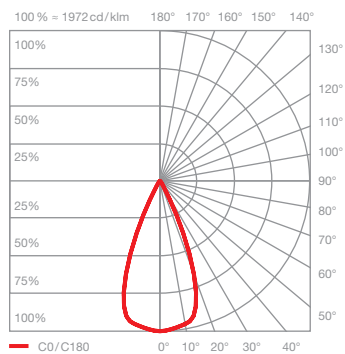


S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens
small lens medium
fresnel lens

luminous flux:	perfect color	26 W	1270 lm
	perfect color	18 W	950 lm
	perfect color	13 W	710 lm



Più piano edge VOLT Più R lighting effects

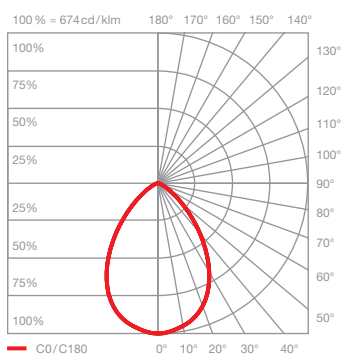

B diffus diffused light

inserts: cone glass
small lens low
satinised glass



luminous flux:	perfect color	26 W	1200 lm
	perfect color	18 W	900 lm
	perfect color	13 W	680 lm

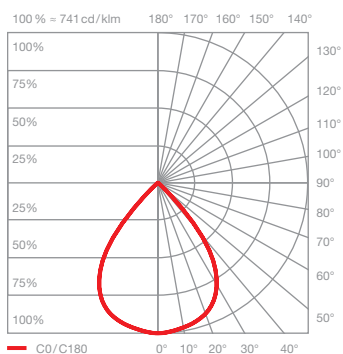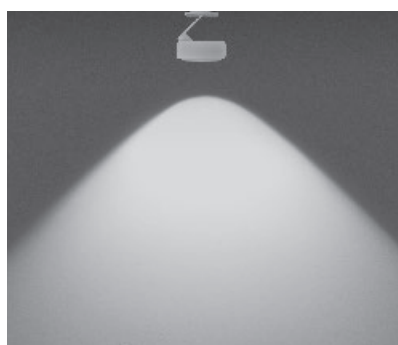

C 100 contour scattered light with contour beam angle (approx. 100°)

inserts: cone glass
small lens low



luminous flux:	perfect color	26 W	1340 lm
	perfect color	18 W	1000 lm
	perfect color	13 W	750 lm

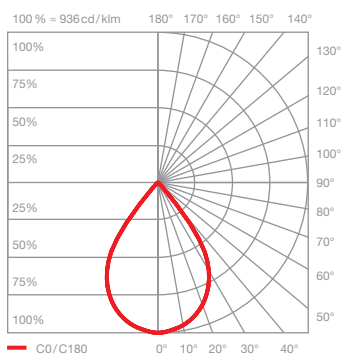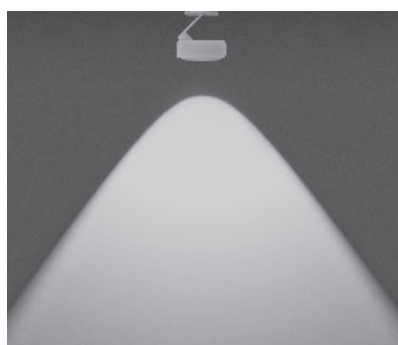

C 80 contour scattered light with contour beam angle (approx. 80°)

inserts: cone glass
small lens medium

luminous flux:	perfect color	26 W	1400 lm
	perfect color	18 W	1050 lm
	perfect color	13 W	790 lm

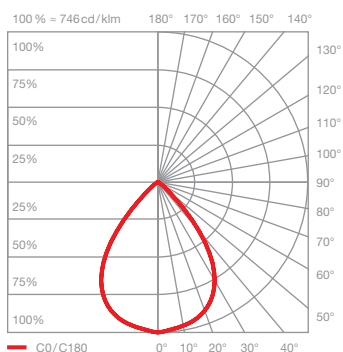
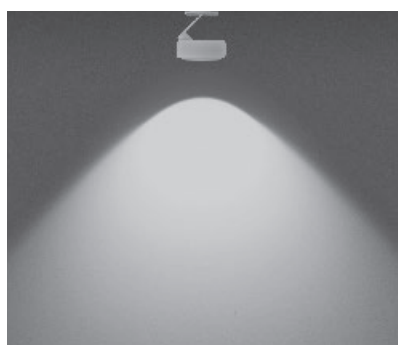


S 100 soft scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass
small lens low
soft edge glass

luminous flux:	perfect color	26 W	1210 lm
	perfect color	18 W	910 lm
	perfect color	13 W	680 lm

Più piano edge VOLT Più R lighting effects

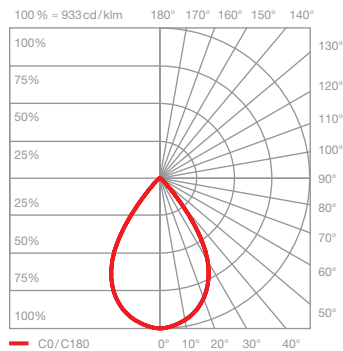
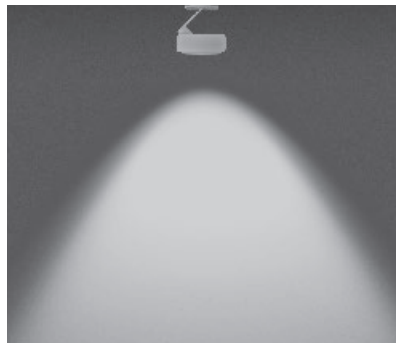


S80 soft

scattered light with soft contour beam angle
(approx. 80°)

inserts: cone glass
small lens medium
soft edge glass

luminous flux: perfect color 26W 1250lm
perfect color 18W 940lm
perfect color 13W 710lm

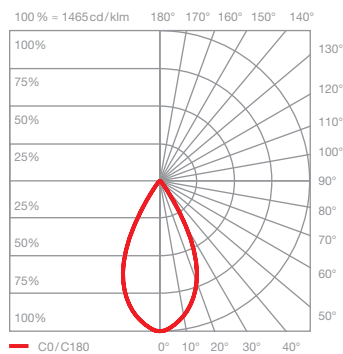
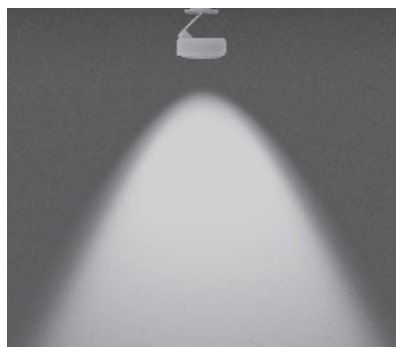


S60 soft

scattered light with soft contour beam angle
(approx. 60°)

inserts: cone glass
small lens high
soft edge glass

luminous flux: perfect color 26W 1220lm
perfect color 18W 920lm
perfect color 13W 690lm

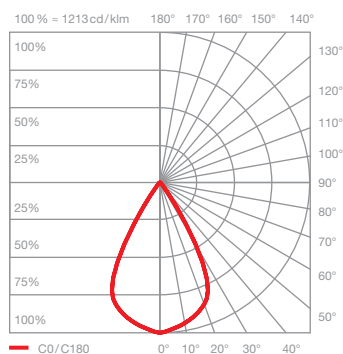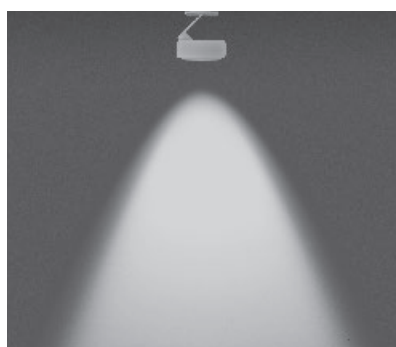


S40 soft

scattered light with soft contour beam angle
(approx. 40°)

inserts: cone glass
small lens medium
fresnel lens

luminous flux: perfect color 26W 1220lm
perfect color 18W 920lm
perfect color 13W 690lm

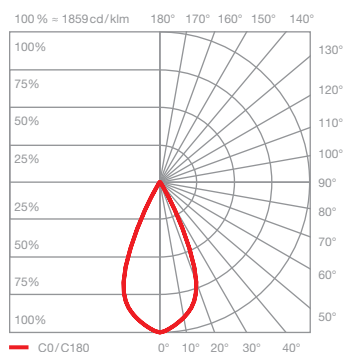

S30 soft

scattered light with soft contour beam angle
(approx. 30°)

inserts: cone glass
small lens high
fresnel lens

luminous flux: perfect color 26W 1250lm
perfect color 18W 940lm
perfect color 13W 700lm