
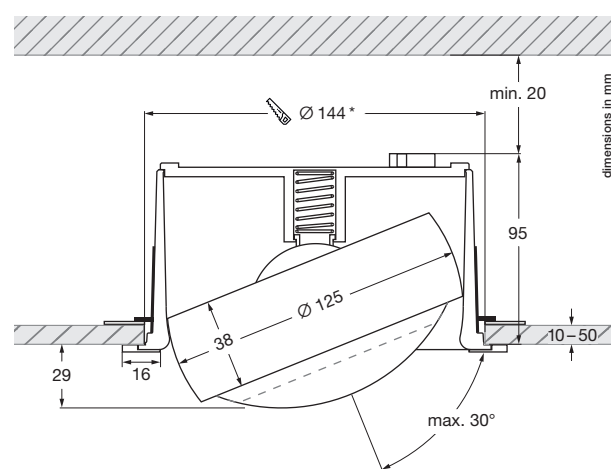


## Più piano pro datasheet

LED recessed spotlight for hollow ceilings or solid ceilings with ceiling box. Mounting flush with ceiling (Più piano) and recessed installation (Più piano in) are both possible. Optionally available with lens optics (Più) or flat cone glass with internal lens (Più R). Version with remote power supply unit, connection to external power source (driver). Dimmable via customer-supplied dimmable power supply unit. Head can be aligned in any direction thanks to the ball joint principle (Più piano: 30°, Più piano in: 20°). Choice of several variants for different installation solutions. Covers that are held in place magnetically are used in ceiling-mounted versions and in frameless models which either have a mounting plate or are mounted on panels that are accessible from the rear (used in hollow ceilings). Using a simple mechanism, the lighting effect can be changed at any time through the use of optional inserts, dichroitic colour filter can be additionally inserted, Occhio light module with replaceable LED.

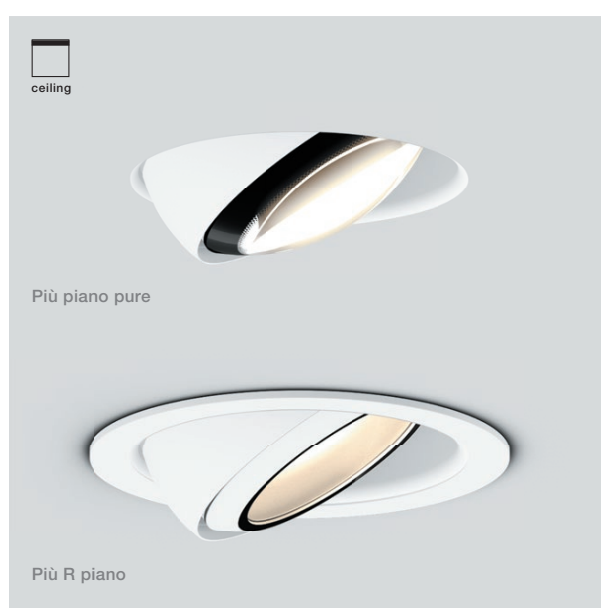

\* cut-out dimensions  
Installation depth: 115 mm  
\*\* minimum thermal distance, installation height depending on driver

----- Più R with cone glass  
—— Più with lens


### technical data Più piano pro

|                     |                                               |                                                                                                                                    |                        |
|---------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| properties          | material                                      | aluminium, brass, steel – chrome-plated or painted, optical plastic, glass                                                         |                        |
|                     | turning range body                            | 360°                                                                                                                               |                        |
|                     | mobility head                                 | 30° (with stop)                                                                                                                    |                        |
|                     | weight                                        | 1.3 kg                                                                                                                             |                        |
| surface             | head / cover                                  | matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom |                        |
|                     | tube                                          | matt white, matt black                                                                                                             |                        |
|                     | lens                                          | matt white, matt black (lens edge)                                                                                                 |                        |
|                     | cone glass                                    | rose gold, bronze, shiny chrome, dark chrome, matt chrome, matt white, matt black, phantom, black phantom                          |                        |
| Occhio light module | average life time                             | > 50.000 hrs                                                                                                                       |                        |
|                     | energy efficiency class (luminous efficiency) | G (69 lm / W)                                                                                                                      |                        |
|                     | power                                         | LED 26 W                                                                                                                           |                        |
|                     | color rendering index                         | perfect color; CRI Ra 97                                                                                                           | high flux; CRI Ra 85   |
|                     | color temperature                             | 2700 K, 3000 K                                                                                                                     | 3000 K, 3500 K, 4000 K |
| electricity         | dimming                                       | by trailing-edge phase-cut dimmer, button or DALI (depending on power supply unit)                                                 |                        |
|                     | power supply unit                             | remote, operation via constant-current source max. 700 mA / > 36 V DC                                                              |                        |
|                     | permitted operating conditions                | ambient temperature 10–30°C, for indoor use only                                                                                   |                        |


## Più piano pro

30° swivel angle  
360° rotatability


**Più piano pro**  
head H 38 mm, ø 125 mm



### mounting tube with cover



hollow ceiling




concrete ceiling  
(Kaiser HaloX 250 with mineral-fibre board)  
driver max. L 210 mm × W 30 mm

cover

**Più piano pro pure**  
head H 38 mm, ø 125 mm




### holding ring for panel for seamless mounting




hollow ceiling  
(mounting from back)

### flush-mount ring for seamless mounting




concrete ceiling plastered, no fair-faced concrete  
(Kaiser HaloX 250 with mineral-fibre board)  
driver max. L 210 mm × W 30 mm

### mounting board for seamless mounting





hollow ceiling  
(mineral-fibre board with holding ring)





\* cut-out dimensions

## Più piano pro overview optics

| Più                     |                                                                                     | C 80                                                                                | S 100                                                                               | S 80                                                                                | S 60                                                                                 | S 40                                                                                  | S 30                                                                                  |                                                                                       |
|-------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                         |                                                                                     |    |    |   |   |    |    |                                                                                       |
| small lens<br>low       |                                                                                     |                                                                                     |                                                                                     |                                                                                     |   |                                                                                       |                                                                                       |                                                                                       |
| small lens<br>medium    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |    |    |                                                                                       |
| satinised glass         |                                                                                     |                                                                                     |    |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
| soft edge glass         |                                                                                     |                                                                                     |                                                                                     |   |   |    |                                                                                       |                                                                                       |
| fresnel lens            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |    |                                                                                       |
| color filter (optional) |                                                                                     |    |    |   |   |    |    |                                                                                       |
| lens                    |                                                                                     |   |   |  |  |   |   |                                                                                       |
|                         |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
| Più R                   | B                                                                                   | C 100                                                                               | C 80                                                                                | S 100                                                                               | S 80                                                                                 | S 60                                                                                  | S 40                                                                                  | S 30                                                                                  |
|                         |  |  |  |  |  |  |  |  |
| small lens<br>low       |  |  |                                                                                     |  |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
| small lens<br>medium    |                                                                                     |                                                                                     |  |                                                                                     |  |                                                                                       |  |                                                                                       |
| small lens<br>high      |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |  |                                                                                       |  |
| satinised glass         |  |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |                                                                                       |
| soft edge glass         |                                                                                     |                                                                                     |                                                                                     |  |  |  |                                                                                       |                                                                                       |
| fresnel lens            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |  |  |
| color filter (optional) |  |  |  |  |  |  |  |  |
| cone glass              |  |  |  |  |  |  |  |  |
|                         |  |  |  |  |  |  |  |  |
|                         | diffus                                                                              | 100°, contour                                                                       | 80°, contour                                                                        | 100°, soft                                                                          | 80°, soft                                                                            | 60°, soft                                                                             | 40°, soft                                                                             | 30°, soft                                                                             |

Più piano pro  
Più lighting effects

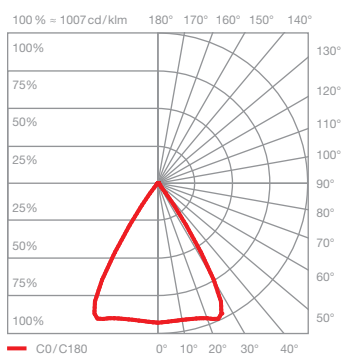
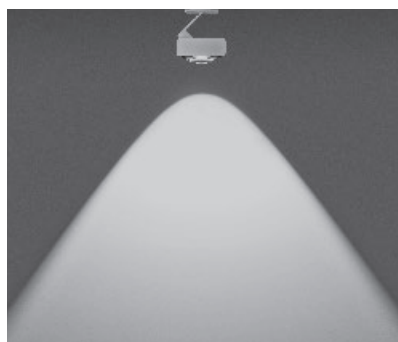


## C 80 contour

scattered light with contour beam angle  
(approx. 80°)

inserts: lens

|                |               |      |         |
|----------------|---------------|------|---------|
| luminous flux: | perfect color | 26 W | 1640 lm |
|                | high flux     | 26 W | 2240 lm |

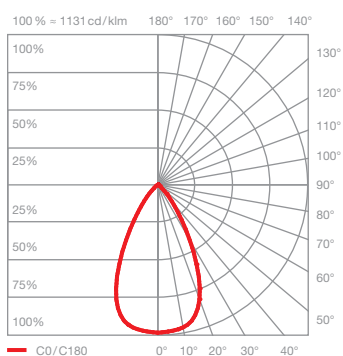
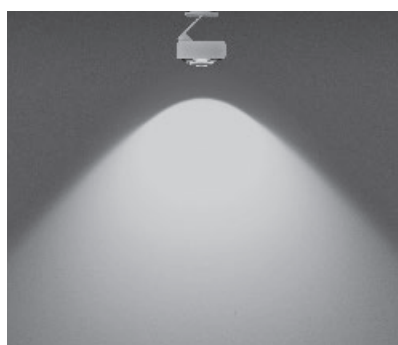


## S 100 soft

scattered light with soft contour beam angle  
(approx. 100°)

inserts: lens  
satinised glass

|                |               |      |         |
|----------------|---------------|------|---------|
| luminous flux: | perfect color | 26 W | 1260 lm |
|                | high flux     | 26 W | 1720 lm |

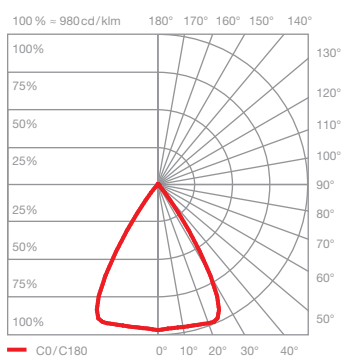
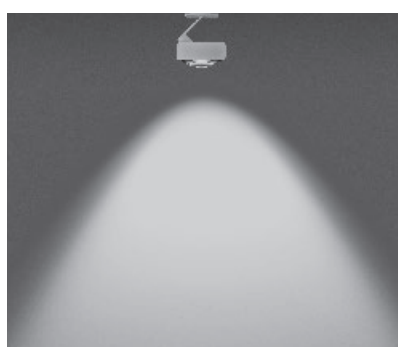


## S 80 soft

scattered light with soft contour beam angle  
(approx. 80°)

inserts: lens  
soft edge glass

|                |               |      |         |
|----------------|---------------|------|---------|
| luminous flux: | perfect color | 26 W | 1420 lm |
|                | high flux     | 26 W | 1930 lm |

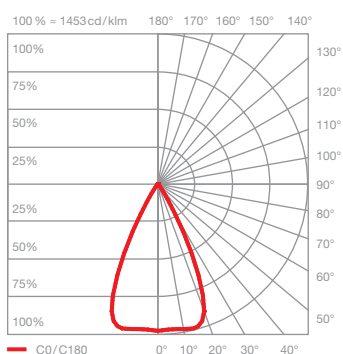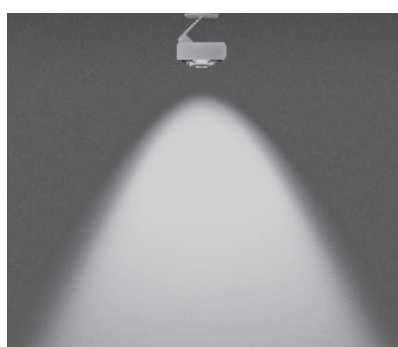



## S 60 soft

scattered light with soft contour beam angle  
(approx. 60°)

inserts: lens  
small lens low  
soft edge glass

|                |               |      |         |
|----------------|---------------|------|---------|
| luminous flux: | perfect color | 26 W | 1610 lm |
|                | high flux     | 26 W | 2200 lm |

Più piano pro  
Più lighting effects

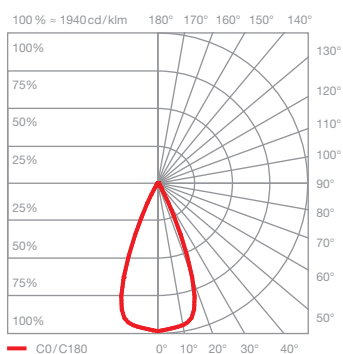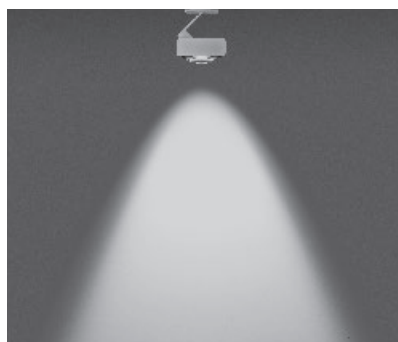


## S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: lens  
small lens medium  
soft edge glass

luminous flux: perfect color 26 W 1680 lm  
high flux 26 W 2300 lm

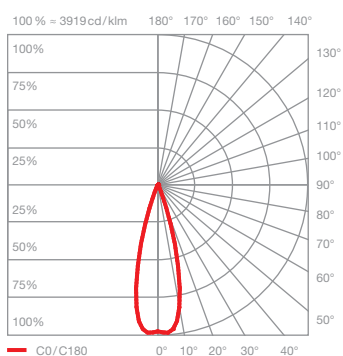


## S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: lens  
small lens medium  
fresnel lens

luminous flux: perfect color 26 W 1650 lm  
high flux 26 W 2250 lm



## Più piano pro Più R lighting effects

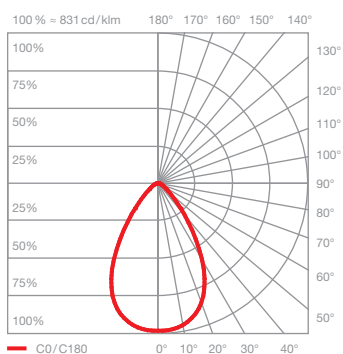

### B diffus diffused light

inserts: cone glass  
small lens low  
satinised glass



luminous flux: perfect color 26 W 1370 lm  
high flux 26 W 1870 lm

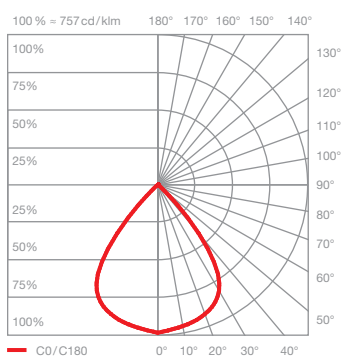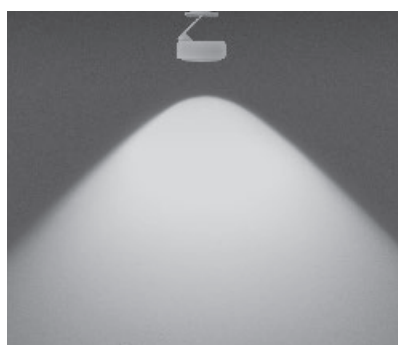

### C 100 contour scattered light with contour beam angle (approx. 100°)

inserts: cone glass  
small lens low



luminous flux: perfect color 26 W 1680 lm  
high flux 26 W 2290 lm

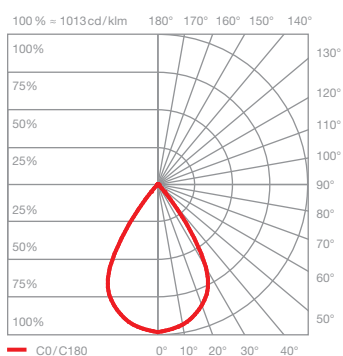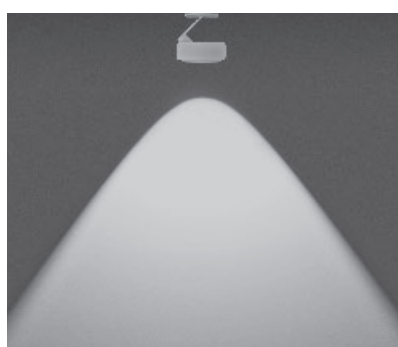

### C 80 contour scattered light with contour beam angle (approx. 80°)

inserts: cone glass  
small lens medium

luminous flux: perfect color 26 W 1810 lm  
high flux 26 W 2460 lm

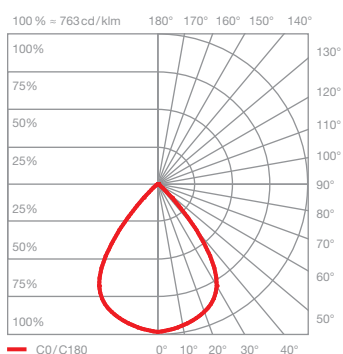
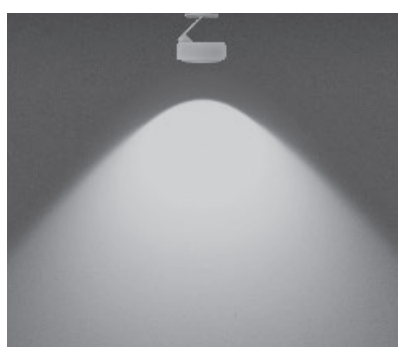


### S 100 soft scattered light with soft contour beam angle (approx. 100°)

inserts: cone glass  
small lens low  
soft edge glass

luminous flux: perfect color 26 W 1520 lm  
high flux 26 W 2070 lm

## Più piano pro Più R lighting effects

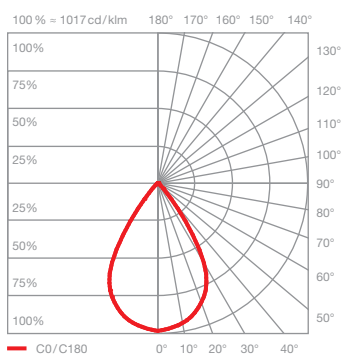
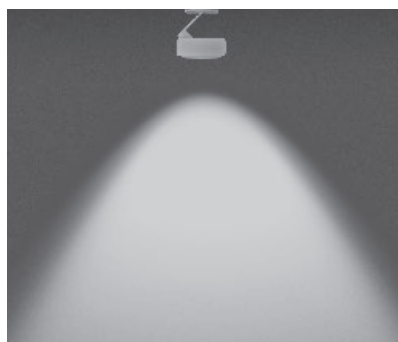


### S80 soft

scattered light with soft contour beam angle (approx. 80°)

inserts: cone glass  
small lens medium  
soft edge glass

luminous flux: perfect color 26W 1690lm  
high flux 26W 2310lm

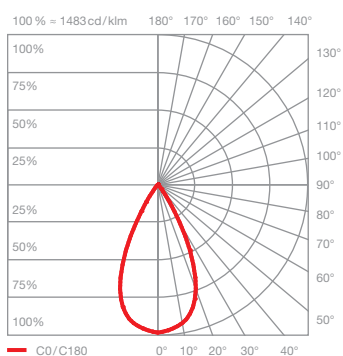
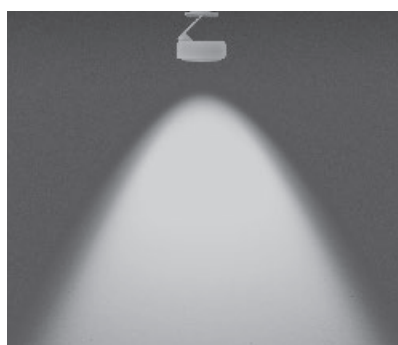


### S60 soft

scattered light with soft contour beam angle (approx. 60°)

inserts: cone glass  
small lens high  
soft edge glass

luminous flux: perfect color 26W 1610lm  
high flux 26W 2200lm

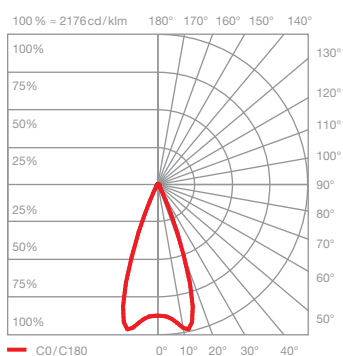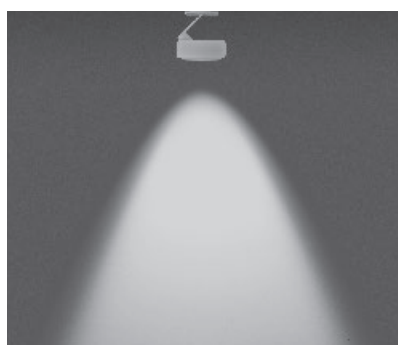


### S40 soft

scattered light with soft contour beam angle (approx. 40°)

inserts: cone glass  
small lens medium  
fresnel lens

luminous flux: perfect color 26W 1600lm  
high flux 26W 2190lm

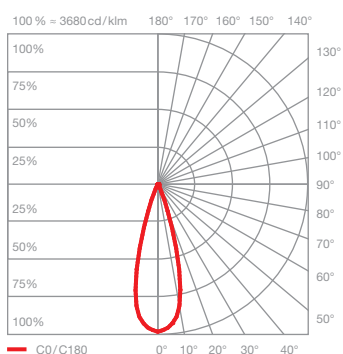

### S30 soft

scattered light with soft contour beam angle (approx. 30°)

inserts: cone glass  
small lens high  
fresnel lens

luminous flux: perfect color 26W 1560lm  
high flux 26W 2130lm