


## Sento soffitto singolo up pro datasheet

LED ceiling luminaire with high base incl. Occhio driver for mounting on solid ceiling, connection to 230V. Modular LED head-body system enables free combination of different surfaces of the head, body and base. Removable head for configuration and maintenance purposes, changeable LED (2700 K/3000 K/4000 K). Heads available with single or double-sided light emission, body available in lengths 30/40/60/80 cm, light output 26 W.

Lighting effect can be changed with optional inserts, dichroic color filters can also be used. Adjustment via heat-decoupled carbon pin. Head can optionally be fixed to prevent twisting.

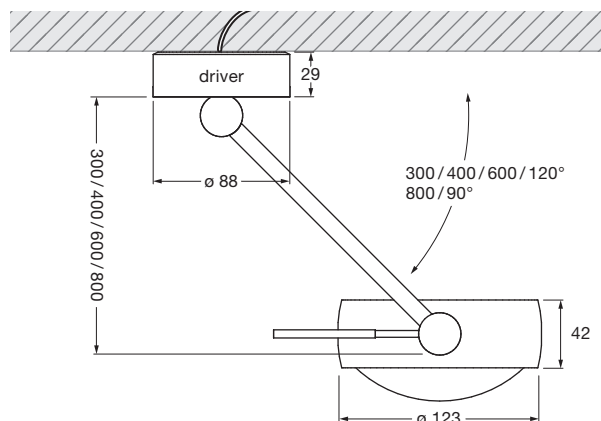

dimensions in mm

### technical data Sento soffitto singolo up pro

|             |                                               |                                                                                                                                    |                      |
|-------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| properties  | material                                      | aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic                                               |                      |
|             | length                                        | 300 / 400 / 600 / 800 mm                                                                                                           |                      |
|             | rotation head                                 | 360°                                                                                                                               |                      |
|             | swivel range                                  | 300, 400, 600 mm 120° / 800 mm 90°                                                                                                 |                      |
|             | weight                                        | 1.8 kg                                                                                                                             |                      |
| surface     | head                                          | matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom |                      |
|             | body                                          | matt white, matt black, shiny chrome, dark chrome, matt chrome                                                                     |                      |
|             | base                                          | shiny chrome, dark chrome, glossy white, matt chrome, matt white                                                                   |                      |
| Occhio LED  | average life time                             | > 50.000 hrs                                                                                                                       |                      |
|             | energy efficiency class (luminous efficiency) | G (head single sided 66 lm / W, head double sided 73 lm / W)                                                                       |                      |
|             | power single sided / double sided             | LED 26 W max. 700 mA (> 36 V DC) / max. 2 x 350 mA (> 36 V DC)                                                                     |                      |
|             | color rendering index                         | perfect color; CRI Ra 97                                                                                                           | high flux; CRI Ra 85 |
|             | color temperature                             | 2700, 3000 K, 4000 K                                                                                                               | 3000, 3500, 4000 K   |
| electricity | dimming                                       | by trailing-edge phase-cut dimmer*                                                                                                 |                      |
|             | power supply unit                             | integrated, for use with 230 V AC                                                                                                  |                      |
|             | permitted operating conditions                | ambient temperature 10–30°C, for indoor use only                                                                                   |                      |



\* For a list of compatible dimmers, see [www.occhio.com/dim\\_en](http://www.occhio.com/dim_en)

## Sento soffitto singolo up pro overview inserts

|                                                          |                                                                                    |                                                                                     |                                                                                       |                                                                                       |
|----------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| single-sided head                                        |   |    |    |    |
| spot lens                                                |                                                                                    |                                                                                     |    |    |
| satinised glass (optional)                               |                                                                                    |    |                                                                                       |                                                                                       |
| soft edge glass (optional)                               |                                                                                    |    |                                                                                       |    |
| fresnel lens                                             |                                                                                    |                                                                                     |    |                                                                                       |
| color filter (optional, power of light source max. 18 W) |   |    |                                                                                       |    |
| diffuser glass                                           |   |                                                                                     |                                                                                       |                                                                                       |
| lens                                                     |                                                                                    |    |    |    |
|                                                          |  |   |   |   |
|                                                          | <b>Sento B</b>                                                                     | <b>Sento C</b>                                                                      | <b>Sento S30</b>                                                                      | <b>Sento S40</b>                                                                      |
| lens                                                     |                                                                                    |                                                                                     |  |                                                                                       |
| diffuser glass                                           |                                                                                    |  |                                                                                       |  |
| color filter (optional, power of light source max. 18 W) |                                                                                    |  |  |  |
| soft edge glass (optional)                               |                                                                                    |                                                                                     |  |                                                                                       |
| satinised glass (optional)                               |                                                                                    |                                                                                     |  |                                                                                       |
| double-sided head                                        |                                                                                    |  |  |  |
| satinised glass (optional)                               |                                                                                    |                                                                                     |  |  |
| soft edge glass (optional)                               |                                                                                    |                                                                                     |  |  |
| color filter (optional, power of light source max. 18 W) |                                                                                    |  |  |  |
| diffuser glass                                           |                                                                                    |  |                                                                                       |                                                                                       |
| lens                                                     |                                                                                    |                                                                                     |  |  |
|                                                          |                                                                                    |  |  |  |
|                                                          | <b>Sento A</b>                                                                     | <b>Sento D</b>                                                                      | <b>Sento E</b>                                                                        |                                                                                       |

## Sento soffitto singolo up pro lighting effects

 head single sided

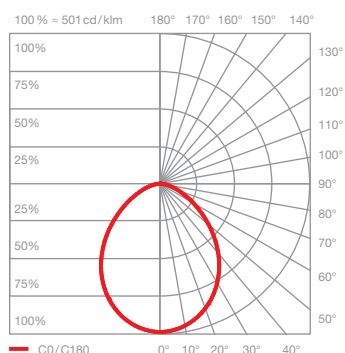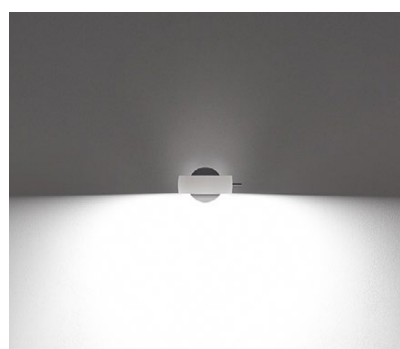


### Sento B

diffuse light

insert: diffusor glass


luminous flux: perfect color 26 W 1370lm  
high flux 26 W 1870lm

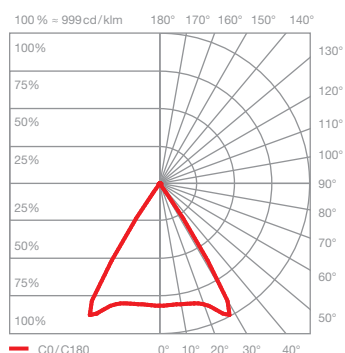

### Sento C

directed light  
beam angle approx. 80°

insert: lens  
luminous flux: perfect color 26 W 1570lm  
high flux 26 W 2150lm


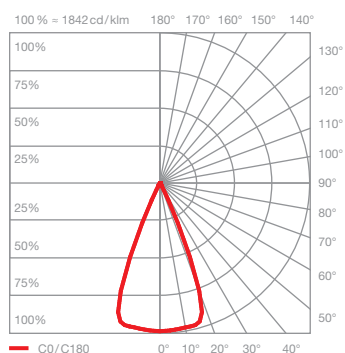


### Sento S40

directed light  
beam angle approx. 40°

insert: spot lens, lens  
soft edge glass

luminous flux: perfect color 26 W 1560lm  
high flux 26 W 2130lm

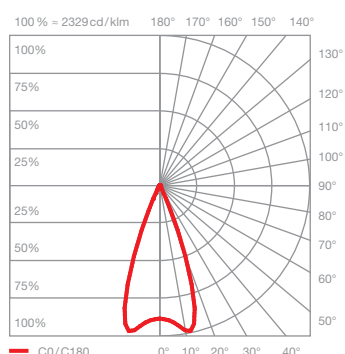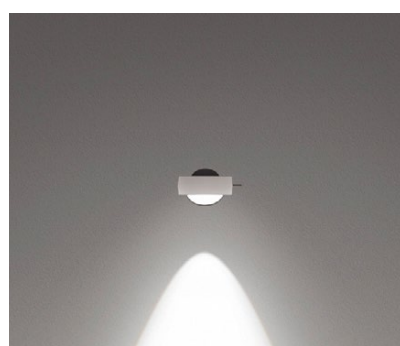

### Sento S30



directed light  
beam angle approx. 30°

insert: spot lens, lens  
fresnel lens

luminous flux: perfect color 26 W 1530lm  
high flux 26 W 2080lm

## Sento soffitto singolo up pro lighting effects

 head double sided

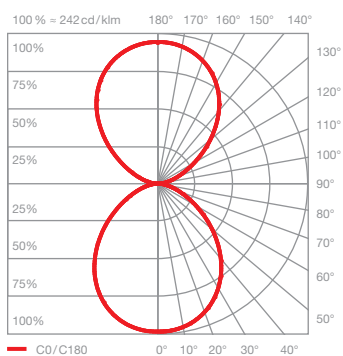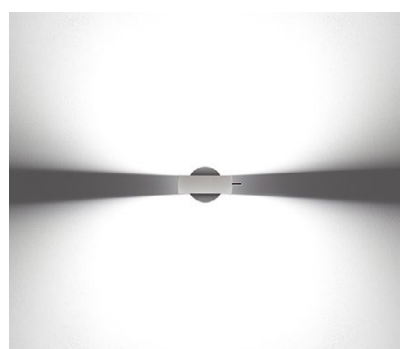


### Sento A

diffuse light in both directions

insert: diffuser glass  
diffuser glass

luminous flux: perfect color 26 W 1500 lm  
high flux 26 W 2040 lm


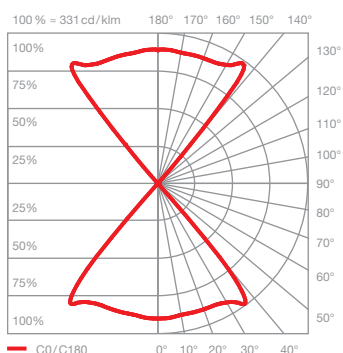


### Sento D

directed light in both directions  
beam angle approx. 80°

insert: lens  
lens

luminous flux: perfect color 26 W 1750 lm  
high flux 26 W 2390 lm

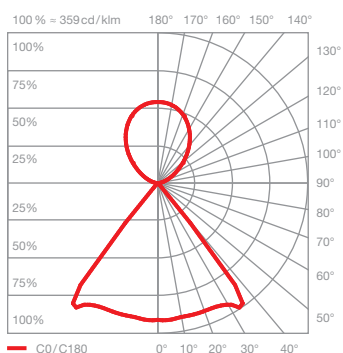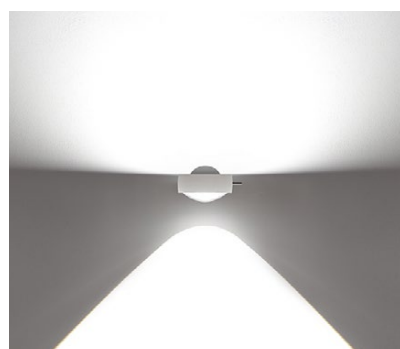

### Sento E

diffuse up light  
directed down light  
beam angle approx. 80°

insert: diffuser glass  
lens

luminous flux: perfect color 26 W 1620 lm  
high flux 26 W 2200 lm