

## Sento sospeso flat pro datasheet


LED suspended luminaire with double sided light output, luminous power 2 × 18W. Lighting effect changeable via optional inserts.

### flat-version with height adjustment

LED suspended luminaire freely height adjustable and flat base base for mounting on hollow ceiling, connection to constant current source (driver). Extern dimmable (depending on the power supply unit).

### flat-version with fixed length

LED suspended luminaire with fixed height adjustment and flat base for mounting on hollow ceiling, connection to constant current source (driver). Extern dimmable (depending on the power supply unit).

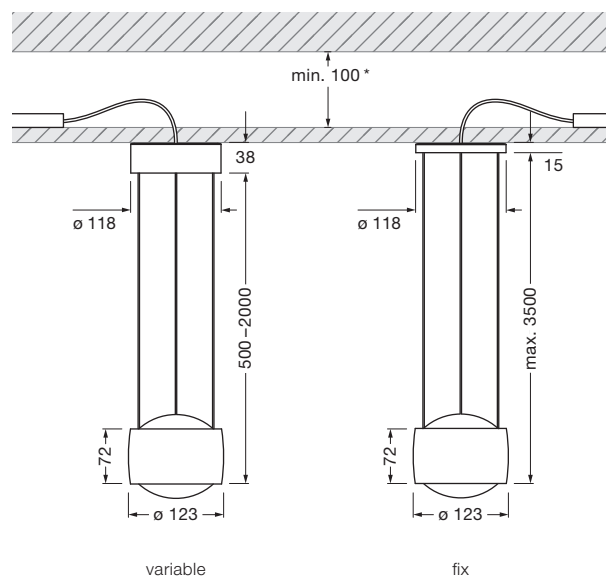

\* with Occhio converter

dimensions in mm

### technical data Sento sospeso flat pro


|             |                                               |                                                                                                                                    |
|-------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| properties  | material                                      | aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic                                               |
|             | height adjustment (variable)                  | 500 – 2000 mm (variable)                                                                                                           |
|             | height setting (fix)                          | max. 3500 mm (can be adjusted during fitting)                                                                                      |
|             | weight                                        | variable: 2.4 kg / fix: 1.9 kg                                                                                                     |
| surface     | head                                          | shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, matt gold, rose gold, bronze, phantom, black phantom |
|             | base                                          | shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black, matt gold, rose gold, bronze, phantom, black phantom |
| Occhio LED  | average life time                             | > 50.000 hrs                                                                                                                       |
|             | energy efficiency class (luminous efficiency) | G (74 lm / W)                                                                                                                      |
|             | power                                         | LED 2 × 18 W max. 2 × 500 mA (> 36 V DC) / LED 2 × 13 W* max. 2 × 350 mA (> 36 V DC)                                               |
|             | color rendering index                         | perfect color; CRI Ra 97      high flux; CRI Ra 85                                                                                 |
|             | color temperature                             | 2700, 3000 K      3000, 3500, 4000 K                                                                                               |
| electricity | dimming                                       | with trailing edge phase cut dimmer, push button, DALI or 1–10 V (depends on driver)                                               |
|             | power supply unit                             | remote, driven by constant current source max. 2 × 500 mA / 36 V DC                                                                |
|             | permitted operating conditions                | ambient temperature 10–30°C, for indoor use only                                                                                   |

\* version shiny chrome, dark chrome, rose gold, bronze, phantom, black phantom

Sento sospeso flat pro  
overview inserts

|                               |                                                                                       |                                                                                       |
|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| lens                          |    |                                                                                       |
| diffuser glass                |                                                                                       |    |
| soft edge glass<br>(optional) |    |                                                                                       |
| satinised glass<br>(optional) |    |                                                                                       |
| double-sided head             |    |    |
| satinised glass<br>(optional) |    |    |
| soft edge glass<br>(optional) |    |    |
| lens                          |    |    |
|                               |  |  |
|                               | Sento D                                                                               | Sento E                                                                               |

## Sento sospeso flat pro lighting effects

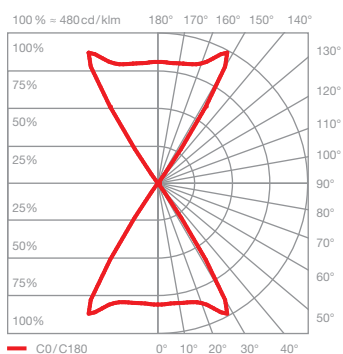


### Sento D

directed light in both directions beam angle  
approx. 80°

inserts: lens  
lens

|                |               |          |         |
|----------------|---------------|----------|---------|
| luminous flux: | perfect color | 2 × 18 W | 2460 lm |
|                | high flux     | 2 × 18 W | 3380 lm |
|                | perfect color | 2 × 13 W | 1690 lm |
|                | high flux     | 2 × 13 W | 2460 lm |

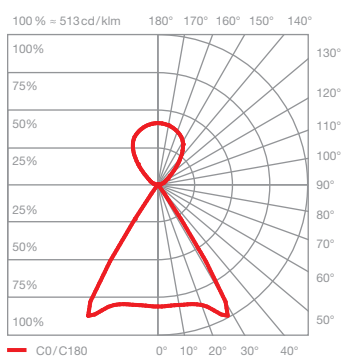

### Sento E

diffuse up light directed down light beam angle  
approx. 80°

inserts: satinised glass  
lens

|                |               |          |         |
|----------------|---------------|----------|---------|
| luminous flux: | perfect color | 2 × 18 W | 2300 lm |
|                | high flux     | 2 × 18 W | 3160 lm |
|                | perfect color | 2 × 13 W | 1580 lm |
|                | high flux     | 2 × 13 W | 2300 lm |