



Puro soffitto singolo mains voltage halogen

Ceiling luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.

Ceiling luminaire Occhio Puro soffitto singolo consisting of

body Occhio soffitto singolo - different length and surfaceces
head Occhio Puro - different lighting effects and surfaceces
Occhio accessories - different mounting options and surfaceces

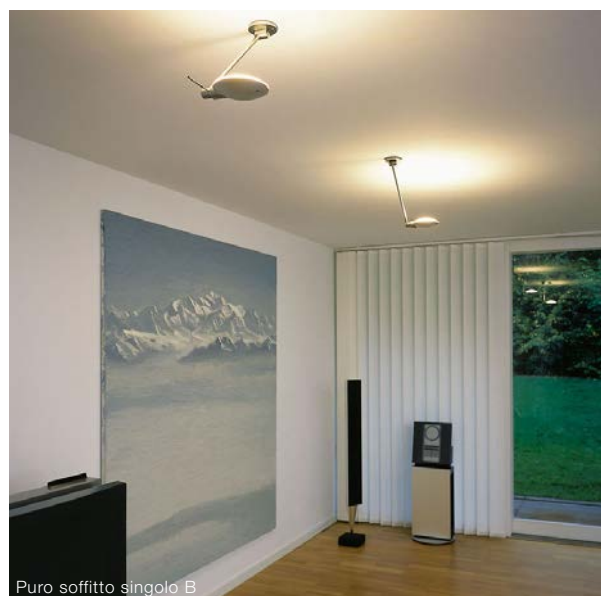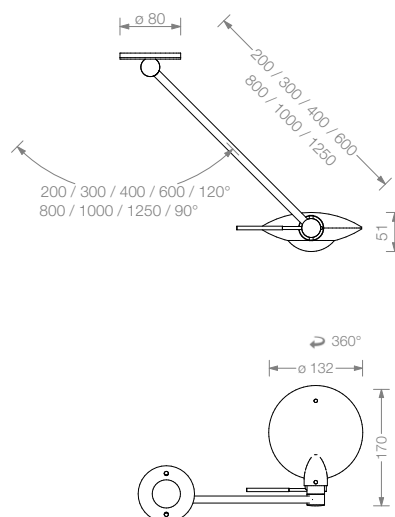

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel
20 cm, 30 cm, 40 cm, 60 cm / 120°
80 cm, 100 cm, 125 cm / 90°

recommended lighting effects
A, B, C, E, P, Q, T, U see p.2 and p.3 cutsheet

light source
mains voltage halogen, operating voltage 230 V
max. 150 W, B15d Eco, (max. 100 W for lighting effect C und E)
energy efficiency grade D, lifetime 2.000 h



luminous flux (bulb)
60 W / 980 lm, 70 W / 1180 lm, 100 W / 1800 lm, 150 W / 2870 lm

color temperature / color rendering
2900 K / CRI 100

weight
body and reflector head max. 1,5 kg

mounting accessories
for surface or recessed mounting, see p.5 cutsheet


Puro soffitto singolo recommended lighting effect

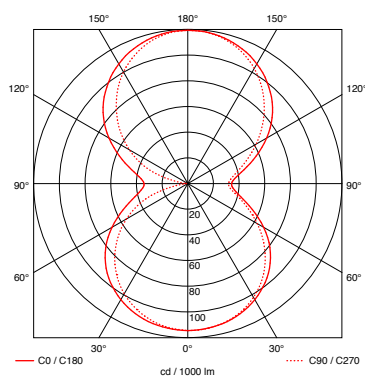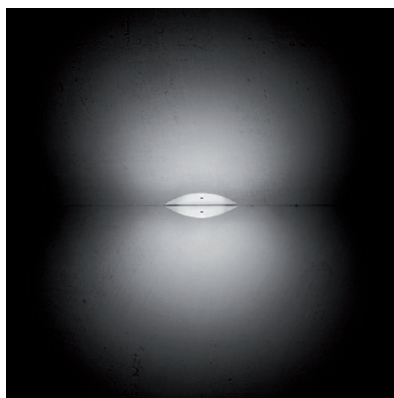

Puro A
reflector head for diffuse light
in two directions

efficiency of reflector head
84%



material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

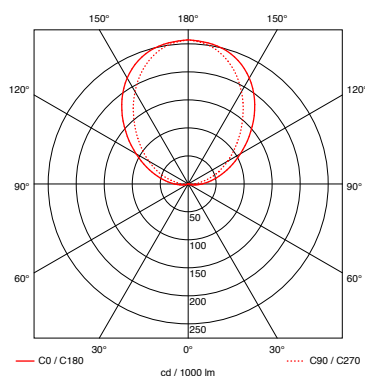

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome

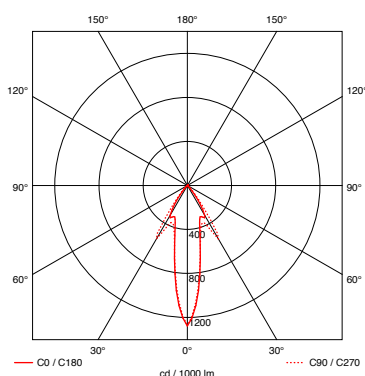
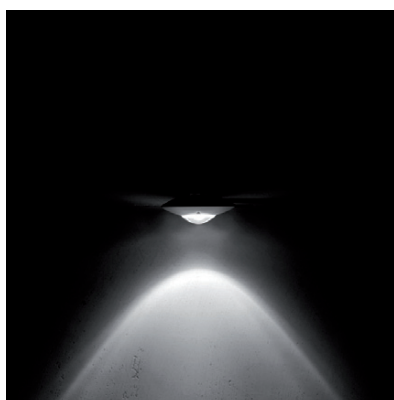


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lense optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

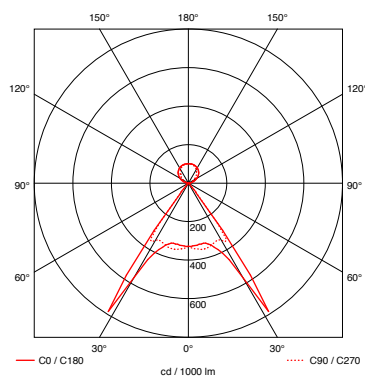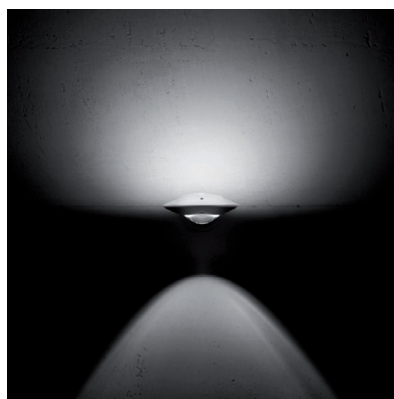



Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lense optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome

Puro soffitto singolo recommended lighting effect

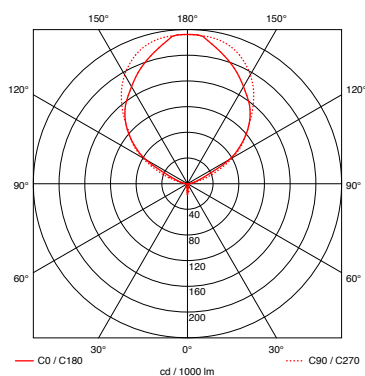
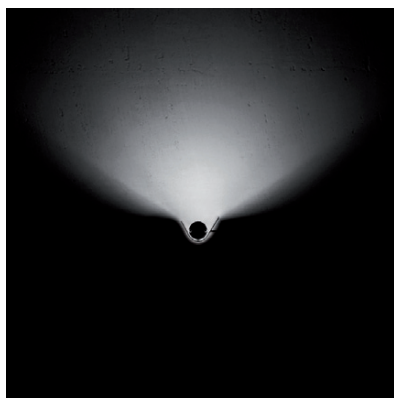


Puro P

reflector head for diffuse light in a symmetrical direction

efficiency of reflector head
55%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

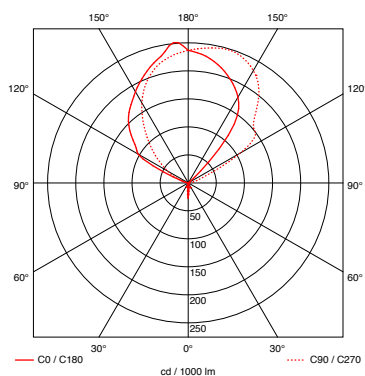
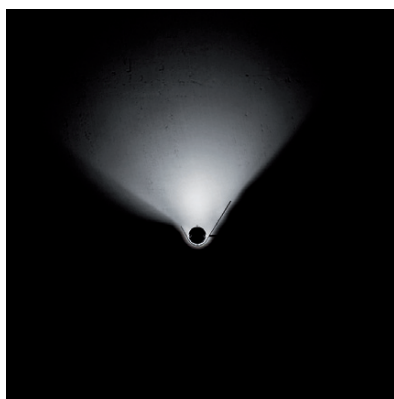


Puro Q

reflector head for diffuse asymmetric light in one direction

efficiency of reflector head
52%

material / surface
reflector matt chrome or chrome
fixture matt chrome or chrome

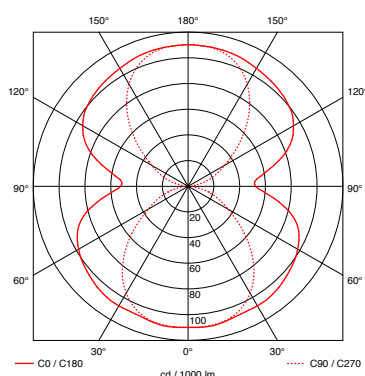
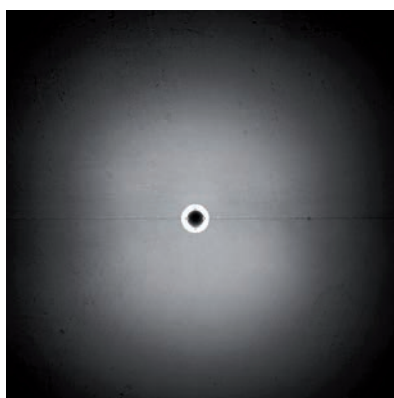


Puro T

reflector head for diffuse light

efficiency of reflector head
75%

material / surface
satinised, heat-resistant glass
fixture matt chrome or chrome

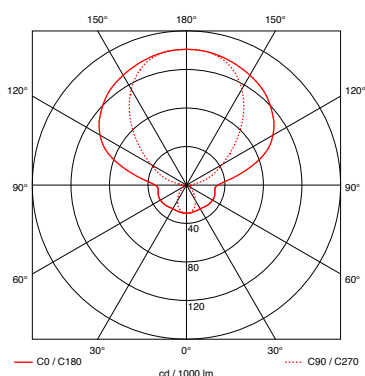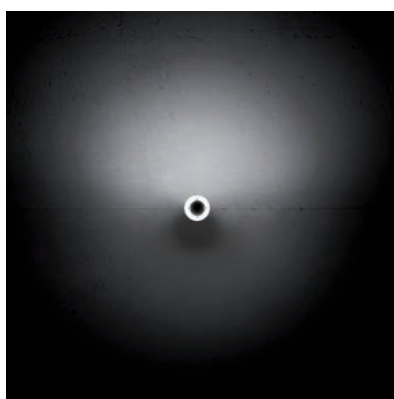

Puro U

reflector head for diffuse symmetric light in one direction

efficiency of reflector head
55%

material / surface
satinised, heat-resistant glass
perforated aluminium reflector
matt chrome or chrome
fixture matt chrome or chrome

cutsheet

Occhio

4 | 5

Puro soffitto singolo

Item numbers

Item number
_chrome matt M
_chrome C


soffitto singolo



max. 1 x 150 W
mains voltage halogen B15d

30 cm	8P 12 00 _
40 cm	8P 13 00 _
60 cm	8P 14 00 _
80 cm	8P 15 00 _
100 cm	8P 16 00 _
125 cm	8P 17 00 _



Puro A		satinised glass / satinised glass	8 K 00 11 _
Puro B		satinised glass / reflector sphere	8 K 00 12 _
Puro C		reflector sphere / lense (max. 100 W) with diffusor*	8 K 00 41 _
Puro E		satinised glass / lense (max. 100 W) with diffusor*	8 K 00 44 _
Puro P		reflector tray, symmetrical	8 K 00 21 _
Puro Q		reflector tray, asymmetrical left version right version	8 K 00 22 _ 8 K 00 22 _ R
Puro T		satinised glass	8 K 00 31 _
Puro U		satinised glass, perforated aluminium reflector	8 K 00 32 _

* Diffusor necessary for ideal light distribution when using clear mains voltage halogen B15d bulb and lens

Puro soffitto singolo
Item numbers

Item number
_matt chrome M
_chrome C

flat box			
		for plastering or wall / ceiling box h 8 mm, ø 80 mm	8Z 00 00 _
	 	180° turnable h 12 mm, ø 80 mm	8Z 00 01 _
spacing box			
		for surface mounting h 22 mm, ø 80 mm	8Z 01 00 _
		with hole for external cable supply h 22 mm, ø 80 mm	8Z 03 00 _
	 	180° turnable h 26 mm, ø 80 mm	8Z 01 01 _