

Puro soffitto due low voltage halogen

Suspended luminaire - modular system consisting of body and head

Thanks to its unique modularity the Occhio head-body system delivers impressive lighting solutions for your room. For different lighting effects diverse, turnable reflector heads are available, which can be easily substituted at any time thanks to a simple plug-in mechanism. The diverse wall and ceiling boxes allow for all recessed and surface mounting options.


Suspended luminaire Occhio Puro soffitto due consisting of

body Occhio soffitto due - different length and surfaces
head Occhio Puro - different lighting effects and surfaces
Occhio accessories - different mounting options and surfaces

IP 20     



Puro soffitto due E

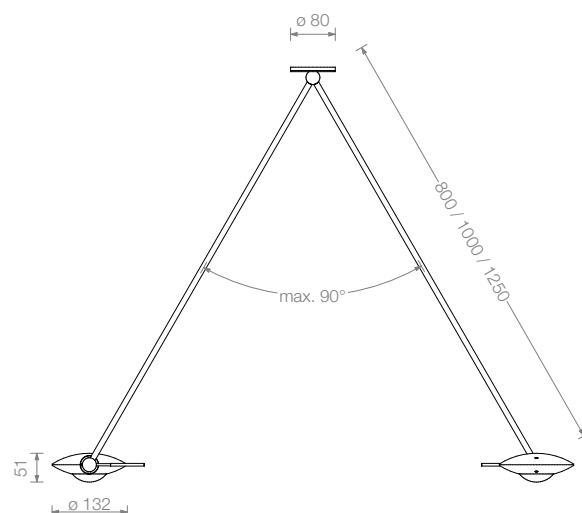

Puro soffitto due E

material
aluminium, brass, steel, glass

surface
head: chrome, aluminium anodised
body: chrome, matt chrome

length / travel
80 cm, 100 cm, 125 cm / 90°

recommended lighting effects
B, C, E see p.2 cutsheet

light source
low voltage halogen, operating voltage 12 V
max. 2 x 60 W, GY6.35, energy efficiency grade B, lifetime 4.000 h

luminous flux (bulb)
35 W / 860 lm, 50 W / 1180 lm, 60 W / 1650 lm

color temperature / color rendering
3000 K / CRI 100

weight
body and reflector head max. 2,8 kg



mounting accessories
for surface or recessed mounting, see p.4

cutsheet

Occhio

2 | 4


Puro soffitto due
recommended lighting effect

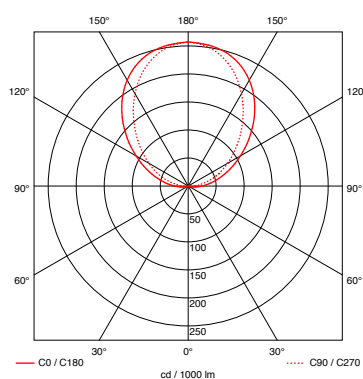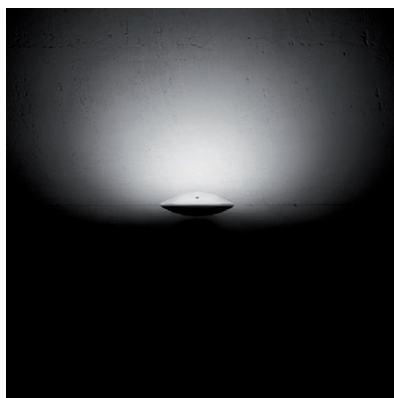

Puro B
reflector head for diffuse light
in one direction

efficiency of reflector head
67%

material / surface
satinised, heat-resistant glass
reflector matt chrome or chrome
fixture matt chrome or chrome


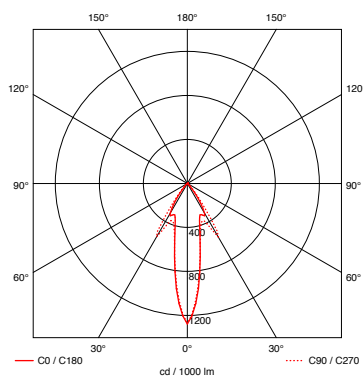


Puro C
reflector head for directed light
in one direction

efficiency of reflector head
54%

beam angle
approx. 65°

material / surface
lens optical glass
reflector matt chrome or chrome
fixture matt chrome or chrome

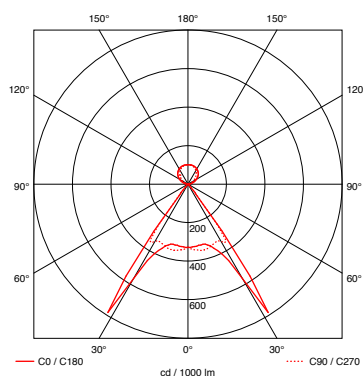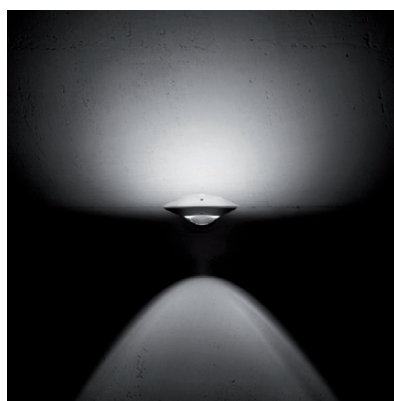

Puro E
reflector head for diffuse light in one direction
and directed light in the other direction

efficiency of reflector head
76%

beam angle
approx. 65°

material / surface
lens optical glass
satinised, heat-resistant glass
fixture matt chrome or chrome


cutsheet

Occhio

3 | 4

Puro soffitto due
Item numbers

Item number
_matt chrome M
_chrome C

soffitto due 	max. 2 x 60W low voltage halogen GY6.35	80 cm 100 cm 125 cm	7S 35 00 _ 7S 36 00 _ 7S 37 00 _
--	--	---------------------------	--



Puro B 	satinised glass / reflector sphere	8 K 00 12 _
Puro C 	reflector sphere / lense	7 K 00 41 _
Puro E 	satinised glass / lense	7 K 00 44 _



--	--	--	--

Puro soffitto due
Item numbers

Item number
_matt chrome M
_chrome C



mounting transformer on site


flat box



for plastering or wall / ceiling box
h 8 mm, ø 80 mm

8Z 00 00 M
8Z 00 00 C

Electronic transformer max. 150 W



for mounting in cavity walls / ceilings,
trailing- or leading-edge dimmable,
50 – 150 W,
l 153 mm, w 54 mm, h 36 mm

7Z 00 03 T

Electronic transformer max. 105 W



for mounting in cavity walls / ceilings,
trailing- or leading-edge dimmable,
35 – 105 W,
l 107 mm, w 52 mm, h 30 mm

7Z 00 01 T

Electronic transformer max. 70 W



for mounting in flush-mounted boxes (wall / ceiling), not for verticale on ceiling, not for plastering box ceiling, trailing- or leading-edge dimmable, 20 – 70 W, ø 53 mm, h 22 mm

7Z 00 02 T



transformer in surface mounted box

Box due

with 2 soffitto singolo
body soffitto singolo see
cutsheet ceiling lamp soffitto singolo



mounting version for
2 x soffitto singolo NV
incl. 2 x electronic transformer
35 – 75 W
l 304 mm, w 88 mm, h 36 mm

track version

matt chrome 7Z 90 2 00 M F
chrome 7Z 90 2 00 C F
bianco / chrome 7Z 90 2 00 B F
nero / chrome 7Z 90 2 00 N F

matt chrome 4Z 90 2 00 M F
chrome 4Z 90 2 00 C F
bianco / chrome 4Z 90 2 00 B F
nero / chrome 4Z 90 2 00 N F