


lui basso datasheet

LED floor spot light with cylindrical head and interchangeable lenses, freely moveable through Occhio 3d-kinematics with two axes of rotation at an angle of 45° to each other. Removable head for maintenance purposes, replaceable LED chip.

Available with a zoom optic for beam characteristics continuously adjustable from 20° to 60° or alternatively with a lens optic with different inserts. Power 18 W switchable and dimmable via slider on the back of the head. Power supply via AC adapter (converter), cable rolled up in the base. The finishes of the head, optics, arm and base are freely configurable.

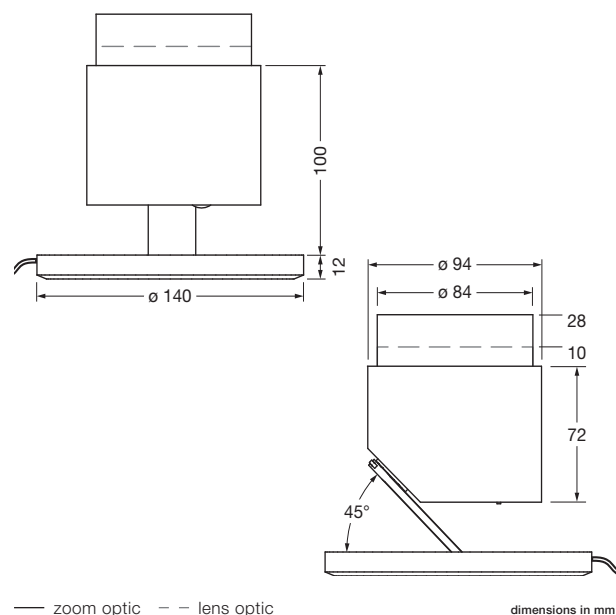

technical data lui basso



properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic	
	turning range body	360° (with stop)	
	turning range head	360°	
	weight	1.40 kg	
surface	head / base	shiny chrome, dark chrome, matt chrome, glossy white, matt white, matt black	
	optic	matt gold, rose gold, bronze, shiny chrome, dark chrome, matt chrome, matt white, matt black, phantom, black phantom	
	body	shiny chrome, dark chrome, matt chrome, matt white, matt black	
Occhio LED	average life time	> 50.000 hrs	
	energy efficiency class (luminous efficiency)	G (zoom optic 48 lm/W, lens optic 54 lm/W)	
	power	LED 18 W (incl. Occhio power supply unit approx. 22 W, standby < 0.5 W) / LED 13 W* (incl. Occhio power supply unit approx. 15 W, standby < 0.5 W)	
	color rendering index	perfect color; CRI Ra 97	high flux; CRI Ra 85
	color temperature (color consistency)	2700 K, 3000 K (2-step)	3000 K, 3500 K, 4000 K (2-step)
electricity	dimming	slider control at the back of the head	
	power supply plug	with integrated converter, operating voltage 230 V AC / 50 Hz, cable length 180 cm	
	power factor power supply (cos φ1)	0.9	
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)	
	permitted operating conditions	ambient temperature 10–30°C, for indoor use only	

* version shiny chrome, dark chrome, rose gold, bronze, phantom, black phantom

lui basso
overview inserts

	zoom	C 80	C 60	S 80	S 60	S 40	S 30
lui head							
zoom optic							
lens optic							
small lens medium							
small lens high							
soft edge glass							
clear glass							
fresnel lens							
	zoom	80°, contour	60°, contour	80°, soft	60°, soft	40°, soft	30°, soft

lui basso lighting effects

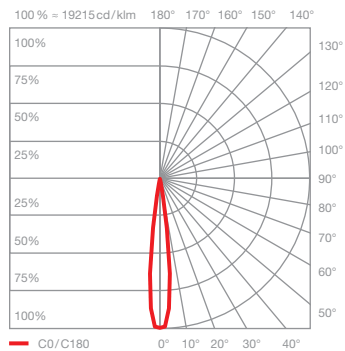
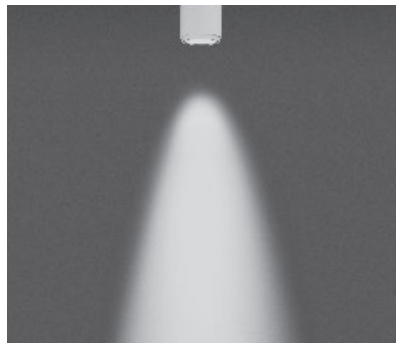


Z20 soft

directed light with soft contour beam angle (approx. 20°)

inserts: zoom lens
soft edge glass

luminous flux:	perfect color	18 W	890 lm
	high flux	18 W	1190 lm
	perfect color	13 W	650 lm
	high flux	13 W	890 lm

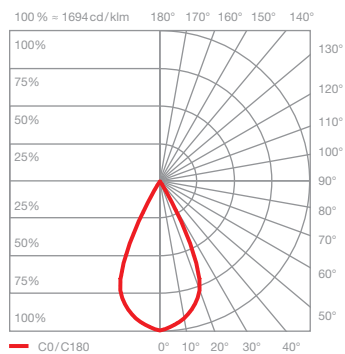
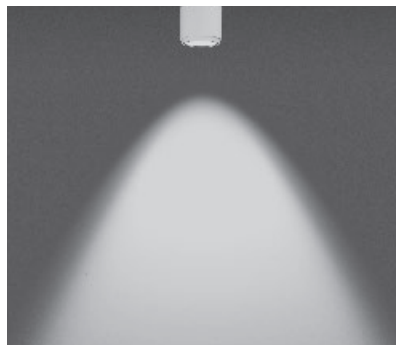


Z60 soft

directed light with soft contour beam angle (approx. 60°)

inserts: zoom lens
soft edge glass

luminous flux:	perfect color	18 W	890 lm
	high flux	18 W	1190 lm
	perfect color	13 W	650 lm
	high flux	13 W	890 lm

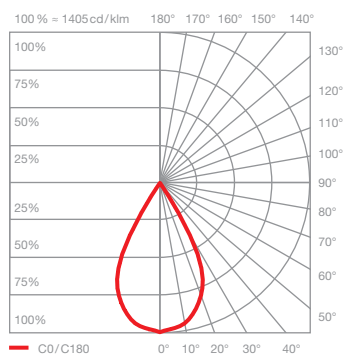
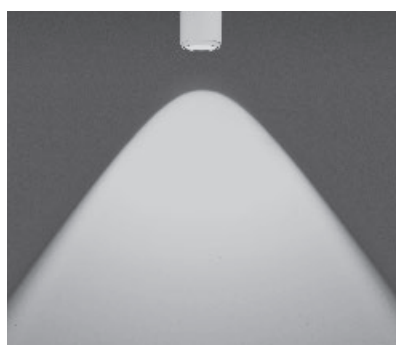


C80 contour

directed light with contour beam angle (approx. 80°)

inserts: lens optic
small lens medium
clear glass

luminous flux:	perfect color	18 W	1010 lm
	high flux	18 W	1350 lm
	perfect color	13 W	740 lm
	high flux	13 W	1010 lm

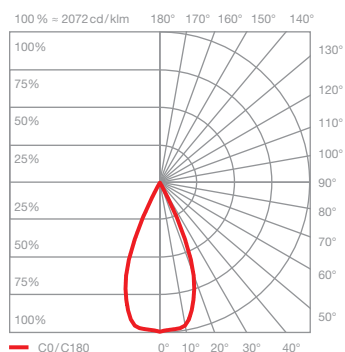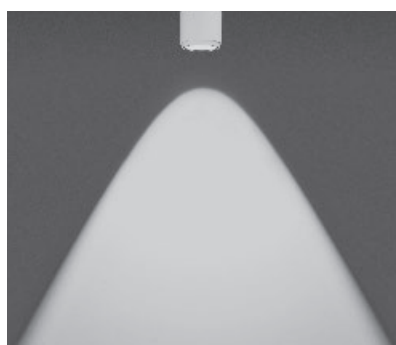


C60 contour

directed light with contour beam angle (approx. 60°)

inserts: lens optic
small lens high
clear glass

luminous flux:	perfect color	18 W	1040 lm
	high flux	18 W	1390 lm
	perfect color	13 W	770 lm
	high flux	13 W	1040 lm



lui basso lighting effects

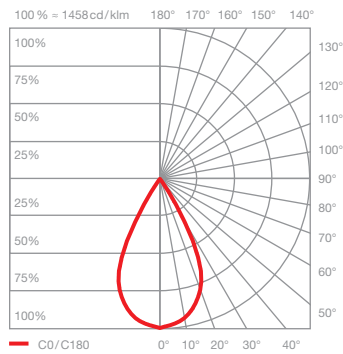

S80 soft
directed light with soft contour beam angle
(approx. 80°)

inserts: lens optic
small lens medium
soft edge glass



luminous flux:	perfect color	18W	1010lm
	high flux	18W	1340lm
	perfect color	13W	740lm
	high flux	13W	1010lm

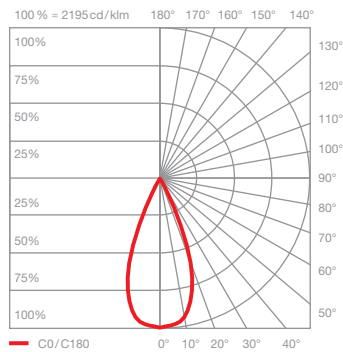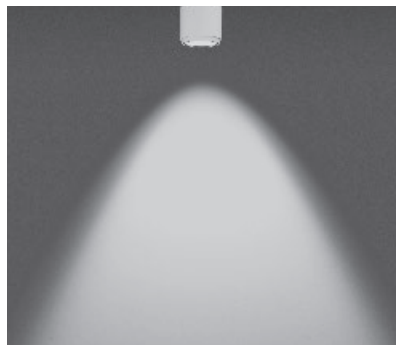

S60 soft
directed light with soft contour beam angle
(approx. 60°)

inserts: lens optic
small lens high
soft edge glass


luminous flux:	perfect color	18W	1010lm
	high flux	18W	1350lm
	perfect color	13W	740lm
	high flux	13W	1010lm

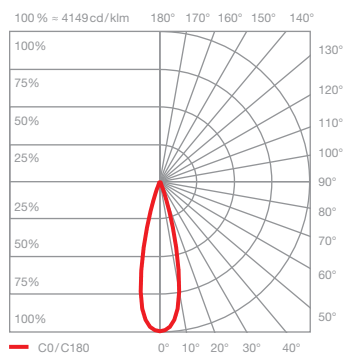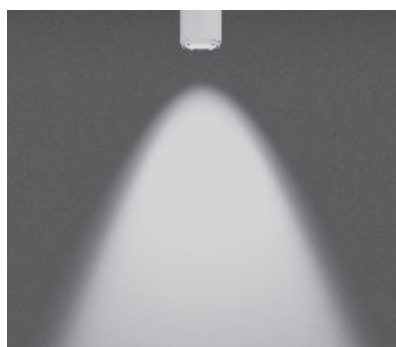

S40 soft
directed light with soft contour beam angle
(approx. 40°)

inserts: lens optic
small lens medium
fresnel lens

luminous flux:	perfect color	18W	910lm
	high flux	18W	1210lm
	perfect color	13W	660lm
	high flux	13W	910lm

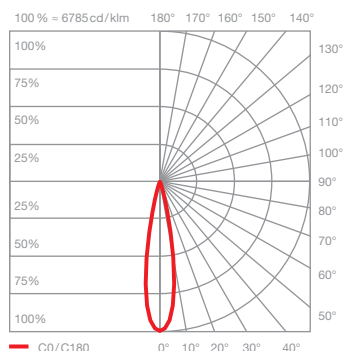

S30 soft
directed light with soft contour beam angle
(approx. 30°)

inserts: lens optic
small lens high
fresnel lens

luminous flux:	perfect color	18W	940lm
	high flux	18W	1250lm
	perfect color	13W	690lm
	high flux	13W	940lm