
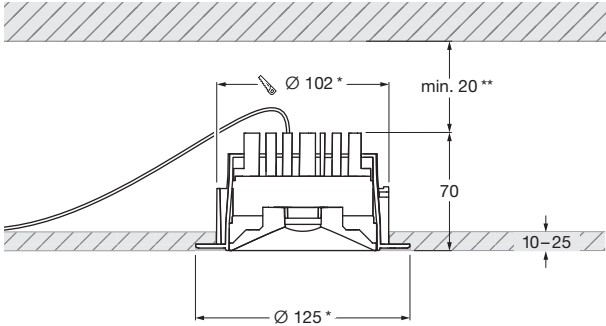


Coro piano v pro pure  
datasheet

LED recessed spotlight with fixed lens optics and a 60° light cone (downlight non-tiltable) for hollow ceilings or solid ceilings with ceiling box. pure model for frameless installation. The spotlight is mounted with a separate plastering ring. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit.


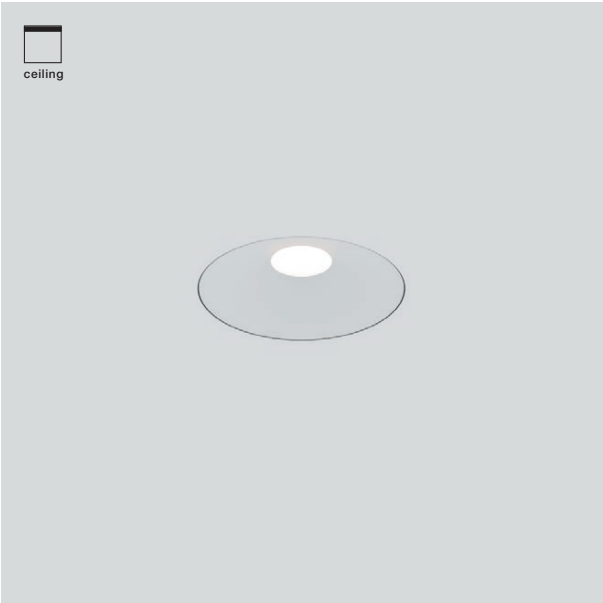


\* Cutout and surrounding fold required for mounting; matching step grinder optionally available  
\*\* minimum thermal distance, installation height depending on driver

dimensions in mm

technical data Coro piano v pro pure		
properties	material	aluminium, glass, painted, plastic
	weight	0,5 kg
surface	tube	matt white, matt black
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (63 lm / W, @4000 K single color)
	power	LED 9 W
	color rendering index	CRI Ra 92
	color temperature (color consistency)	single color: 2700 K, 3000 K, 4000 K (2-step) color tune: 2200–3500 K (2-step)      2700–4000 K (2-step)
electricity	dimming	with suitable power supply unit
	connection	single color (1-channel): max. 500 mA / 18 VDC color tune (2-channel): max. 1000 mA total current (I <sub>1</sub> + I <sub>2</sub> ) / 9 VDC per channel
	permitted operating conditions	max. 30°C for indoor use only

Coro piano v pro pure  
lighting effects

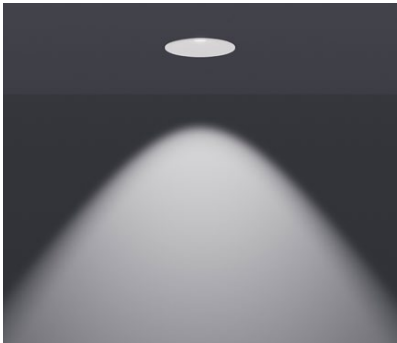

<b>lens</b>		
direct light, beam angle approx. 60°		
optics:	lens	
power:	high color	9 W
luminous flux:	2700 K	430 lm
	3000 K	460 lm
	4000 K	520 lm
	2200–3500 K	310–410 lm
	2700–4000 K	360–430 lm