
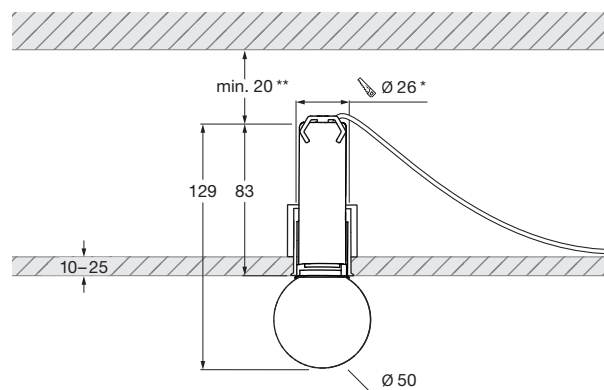


## Coro moon zero v pro datasheet

LED recessed spotlight with fireball light source (downlight non-tiltable) for hollow ceilings with revision. zero model for flush mounting. The spotlight is mounted with a separate mounting sleeve. Version with remote power supply unit, connection to external constant current power source (driver). Dimmable via customer-supplied dimmable power supply unit. The innovative LED fireball technology creates a special lighting effect - direct, downward-facing light and atmospheric illumination by the fireballs indirect light. The fireball as a light source has a light cone of 50°.

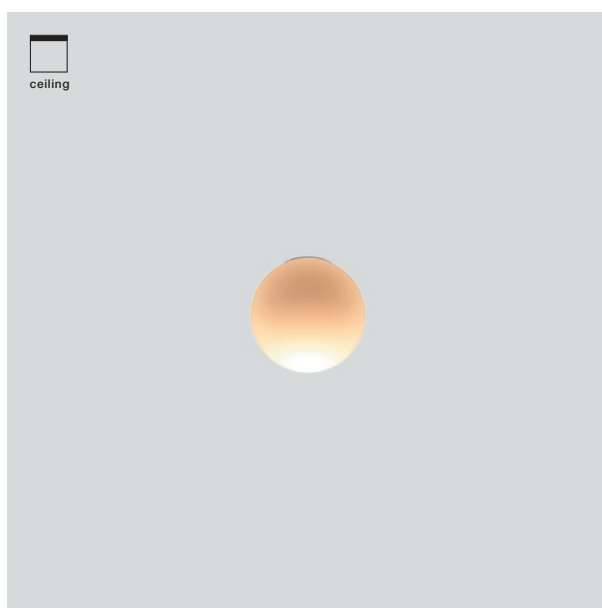

\* cut-out dimensions



\*\* minimum thermal distance, installation height depending on driver

dimensions in mm

### technical data Coro moon zero v pro

|             |   |   |
|-------------|---|---|
| properties  | material                                      | aluminium, glass, painted, plastic  |
|             | weight  | 0,3 kg  |
| surface     | holding ring                                  | white, black  |
| Occhio LED  | average life time                             | > 50.000 hrs  |
|             | energy efficiency class (luminous efficiency) | F (106 lm / W, @4000 K single color)  |
|             | power   | LED 7 W   |
|             | color rendering index                         | CRI Ra 92   |
|             | color temperature (color consistency)         | single color: 2700 K, 3000 K, 4000 K (2-step)<br>color tune: 2200-3500 K (2-step) 2700-4000 K (2-step)                                  |
| electricity | dimming                                       | with suitable power supply unit   |
|             | connection                                    | single color (1-channel): max. 390 mA / 18 VDC<br>color tune (2-channel): max. 780 mA total current ( $I_1 + I_2$ ) / 9 VDC per channel |
|             | permitted operating conditions                | max. 30°C for indoor use only   |
|             |   |   |

Coro moon zero v pro  
lighting effects

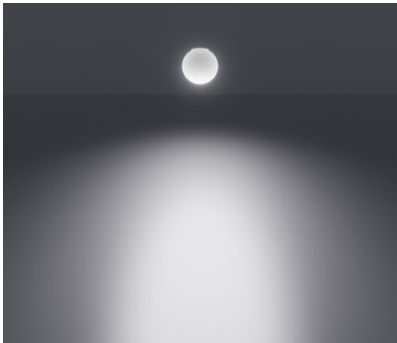

**moon**

direct, glare-free light,  
beam angle approx. 50°

optics:                    Occhio fireball

power:                    high color                    7 W

luminous flux:                    2700 K                    560 lm  
   3000 K                    600 lm  
   4000 K                    680 lm  
   2200–3500 K                    420–550 lm  
   2700–4000 K                    480–590 lm